## Research Quality is our Standard







## **Sales Policy**

#### PLACING ORDERS

Written confirmations, clearly marked as confirmations, are required on orders placed verbally for \$500 USD or over. For established accounts in good standing, shipments will be made prior to receipt of written confirmation at customer's risk. On non-established accounts, shipments will be made on receipt of advance payment or on a Credit card. No orders will be honored from delinquent accounts. Telephone orders may be placed between 8:15 AM & 4:30 PM Monday through Thursday and 8:15 AM to 11:45 AM on Friday, EST. No collect calls will be accepted. Faxed and Email orders will be accepted 24 hours.

#### CONDITIONS OF SALE

SHIPPING POINT: Cedar Grove, NJ 07009 USA

F.O.B. POINT: Cedar Grove, NJ 07009 USA

SHIPPING CHARGES: Prepaid and added to invoice except truck which is shipped collect.

**REMITTANCE**: US funds

PAYMENT TERMS:

Established Accounts –

USA, Canada, Mexico......Net 30 days / Credit Card

Non-Established Accounts -

Cash in Advance / C.O.D / Credit Cards (Am Ex, MasterCard, Visa).

MINIMUM ORDER AND HANDLING CHARGE: All minimum order values apply to list prices. Purchases below the minimum order requirements are subject to a handling charge-

Minimum Order

Handling Charge

USA, Canada, Mexico:

\$50.00

The difference between

International:

\$70.00

the minimum and your order total

### **DOCUMENTATION AND COLLECTION CHARGES:**

Bank collection charges.....\$25.00 to \$30.00

Invoices issued to firms outside USA will contain an additional charge for converting foreign to US funds. This charge may be deducted from invoice if remittance is

drawn on a US bank and encoded for US Federal Reserve System.

Other documentation and/or forwarding fees......At Cost

CANCELLATIONS: Accepted only on unshipped items. If shipped, see RETURNS.

DAMAGED GOODS: Report damage within 10 days of date received. Hold all materials and packing for inspection and instructions. If condition of package (mess, odor, etc.) makes holding inadvisable, call carrier (e.g. trucker, post office, UPS or air carrier) immediately and request inspection and disposition. NOTE- take name of inspector or advisor for future reference.

RETURNS: Custom Liquids made to your specifications are not returnable. Other products are returnable prepaid within 3 months only with a Return Authorization (R/A) number issued in advance. Do not return any goods without proper authorization. Returned goods received in a salable condition are subject to a 15% minimum re-stocking charge calculated on net price billed plus charges for repacking, reconditioning or special handling. Note: Please pack returns carefully.

PLEASE NOTE THAT PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE.

#### **CARGILLE LABORATORIES**

55 Commerce Road, Cedar Grove, NJ 07009 - 1289 USA PH: (973) 239-6633 / FAX: (973) 239-6096

www.CARGILLE.com

# DISPOSABLES

Sargille®

PLASTIC BEAKERS

PAPER BEAKERS


MICROBEAKERS

MICROBOXES

GRADUATES

STIRRING RODS

## **CARGILLE LABORATORIES**

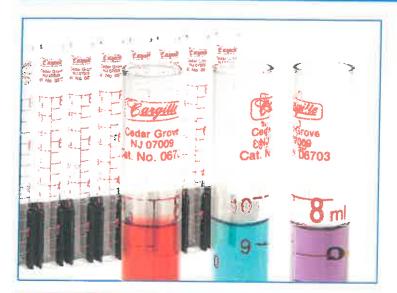




Graduated to 8 mL and in 10 equal parts

- Clear Glass low expansion non-borosilicate
- 8 Milliliters, 10 equal parts
- Permanent graduations
- Ideal for measuring small volumes
- Disposable avoid contamination

available


Racks • Corks • PolyPlugs

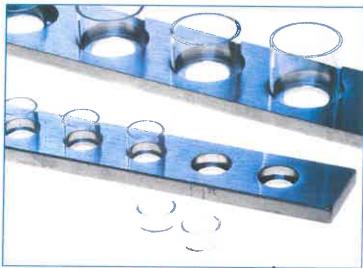

## MICROBEAKERS racks available

- Clear Glass Durable
- Versatile Sterilizable and Disposable
- Process Micro-Samples Color comparisons
- Iodine Number Deteriorations
- Ideal for micro volumes from .5 mL to 7.5 mL
- Weighing Evaporating
- Optical Examination
   Dust Covers
- Custom Size Options

Ask for Microbeakers Datasheet

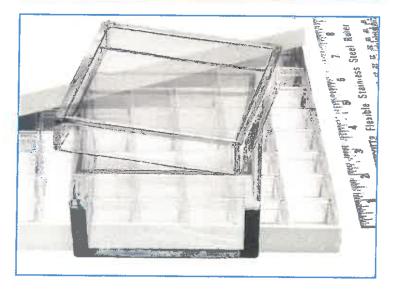

## MICRO PLASTIC BOXES tray boxes available

Tray Boxes of 100 3/4" x 1/2"

- Clear Styrene Plastic
- Inexpensive
- Ideal for high volume Micro-Specimen Storage
- Fiberboard Tray Box also available alone
- Disposable avoid contamination

Also See Tray Sets on Plastic Boxes Datasheet for other sizes



Tel: 973-239-6633 • Fax: 973-239-6096 • Cedar Grove NJ 07009-1289 USA

## **CARGILLE LABORATORIES**



### **STACCUPS®** Graduated Beakers

Polypropylene Large 500 cc, Small 120 cc

- Sterilizable and "Deep Freeze-able"
- Chemically Un-reactive Resistant to most solvents, acids, alkalies, salts, organics and biologicals
- Leak-Proof, seamless, E-Z Pour 360° Spout
- Stable Unique underside rim provides maximum stability
- Stackable external non-stick ribs for thorough blending, easier cleaning



#### DISCUPS® Graduated Beakers 120 cc

Customers demanded the return of the paper beaker: plain finish uncoated paper does things plastic can't. DISCUPS® are for those who need the benefits of paper and for those who prefer a choice

- Graduated in English and Metric units:
   4 fl.oz. at 1/2 fl.oz. int., and 120 cc at 10 cc int.
- Constructed of unwaxed, plain-finish paper
- Disposably priced for one-time use




## **DISPENSERS** Stainless Steel, Large & Small

- Supply window
- Top-loading, bottom-dispensing
- Hardware for wall-mounting

#### WOOD STIRRING RODS 8"

Strong, sturdy for all types of lab, experimental and formulation work. 3/8" OD x 8"



Easy-to-use and disposably priced for one-time use



Tel: 973-239-6633 • Fax: 973-239-6096 • Cedar Grove NJ 07009-1289 USA



## DISPOSABLES PRICE LIST

Replaces: DSP-PL-197A Effective: January 15, 2022

## STACCUPS® 120 cc and 500 cc Graduated Polypropylene Beakers

Cat.# 06604 - SMALL: grad. to 4 fl oz / 120 cc 25 / pkg 1000 / case: shipping wt. 30 lbs ( 1000 in a case ...... \$ 550.00 )

							EC	ON	OM	ICAL C	ASE	LC	TS:	
QUANTITY:	50		100	500			1 M			5 M			10 M	
SMALL	\$ 61.25	/50	\$ 75.25 /C	\$ 63.75	/C	\$	55.00	/C	\$	47.50	/C	\$	40.75	/C
						EC	ONOMI	ICAI	L C	ASE LO	TS:			
LARGE	\$ 69.75	/50/	\$ 118.75 /C	\$ 87.00	/C	\$	72.75	/C	\$	62.25	/C	\$	58.75	IC)

### STACCLIDS ™ for 500 cc Beakers

Cat.# 06518	500 cc	25 / pkg	600 / case:	shipping wt. 13 lbs
		6.13		abb2aaa

	Buot Gottel Biggi thing -				600	/case:		ECONOMICAL CASE LOTS:							
500 cc	QUANTITY		50		100			600			1.2 M		3 M		
	# 06518	\$	68.25	/50	\$	94.50	/C	\$	93.00	/C	\$ 84.00	/C	\$	82.25	/C /

## **DISPENSERS** for 120 cc or 500 cc Beakers

Small ( 120 cc / 4 fl oz )	Cat.# 06405	Stainless Steel	\$108.00 ea.
Large ( 500 cc / 17 fl oz )	Cat.# 06416	Stainless Steel	\$113.75 ea.

SEE OTHER SIDE FOR WOOD STIRRING RODS AND 8-10 DISPOSABLE CYLINDERS





## DISPOSABLES PRICE LIST

### **WOOD STIRRING RODS**

Disposable 8" Long, 3/8" Diameter Round Skewers SPECIFY PACKAGING AND TOTAL QUANTITY

Prices Per Box & Per Hundreds in Quantities of:

		1	
Catalog	# 06388 / 100	# 06388 / 250	# 06388 / 2000
Packagin	BOXES OF 100	BOXES OF 250	CASES OF 2,000
WOOD	100 \$ 58.25 /C	1 x 250 \$ 99.00 /bx	1 x 2,000 \$ 450.25 /cs
STIRRIN	600 \$ 54.50 /C	2 x 250 \$ 87,00 /bx	2 x 2,000 \$ 404.00 /cs
G RODS	1200 \$ 53.25, /C	4 x 250 \$ 78.75 /bx	5 x 2,000 \$ 361.25 /cs
Shipping	2.2 lbs / bx	5.5 lbs / bx	42.5 lbs / cs

PRICES SUBJECT TO CHANGE WITHOUT NOTICE SEE POLICY FOR FULL TERMS FOB & SHIPPING POINT: CEDAR GEOVE, NEW JERSEY MINIMUN ORDER: USA, CANADA, MEXICO - \$ 50.00 • INTERNATIONAL - \$ 70.00

Ph: 973-239-6633: 8:15 AM - 4:45 PM Mon - Thurs. 8:00 AM - 12:00 PM Fri. ET Fax: 24-hour 973-239-6096 / www.Cargille.com 55 Commerce Road • Cedar Grove • NJ 07009-1289 • USA

### CARGILLE LABORATORIES

SEE PAGE ONE FOR DISPOSABLE GRADUATED BEAKERS AND LIDS

Tel: 973-239-6633 • Fax: 973-239-6096 • Cedar Grove NJ 07009 - 1289 USA



WWW.CARGILLE.COM

HL-PL-198

Replaces: HL-PL-197A Effective: January 15, 2022



### **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

PRICE SCHEDULE

#### CARGILLE PRECISION-CALIBRATED HEAVY LIQUIDS

TO DETERMINE PRICE: Find the density range and read across under the appropriate quantity column. WHEN ORDERING: Specify catalog number, specific density of liquid, and tolerance required.

STANDARD TEMPERATURE IS 23 °C — STANDARD TOLERANCE IS ± 0.005 g/cc\*

Keep in mind - A single liquid may have only one density.

#### **AQUEOUS SERIES**

INORGANIC SA	L I	8
--------------	-----	---

#### PRICE PER LIQUID

Cat. No.	Density: g/cc	<u>1 oz</u>	. (30cc)	4 oz	. (120cc)	2 :	< 4 oz.{24	10cc)	1 pt.	(475cc)	2 x1pt.(	950cc)
#12110	1.00 - 1.24	\$	74.75	S	149.50	\$	126.50	/ 4 oz	\$	325.00	\$ 316.00	/ pt
#12120	1.25 - 1.49	\$	74.75	\$	149.50	\$	126.50	/ 4 oz	\$	325.00	\$ 316.00	/ pt
#12130	1.50 - 1.74	\$	75.50	\$	150.75	\$	128.00	/ 4 oz	\$	333.50	\$ 327.00	/ pt
#12140	1.75 - 1.99	\$	75.50	\$	150.75	\$	128.00	/ 4 oz	\$	333.50	\$ 327.00	/ pt
#12150	2.00 - 2.24	\$	75.50	\$	157.25	\$	129.25	/ 4 oz	\$	343.50	\$ 333.50	/ pt
#12160	2.25 - 2.49	\$	75.50	\$	157.25	\$	129.25	/ 4 oz	\$	343.50	\$ 333.50	/ pt

NOTE: The Inorganic Salts are slightly acidic, relatively non-toxic, and water soluble

#### ORGANIC SERIES

#### PRICE PER LIQUID

Cat. No.	Density: g/cc	1 02	. (30cc)	4 oz	. (120cc)	2	x 4 oz.(24	10cc)	1 pt.	(475cc)	2 x1pt.(	950cc)
#12410	.80 - 1.99	\$	70.50	\$	135.00	\$	99.25	/ 4 oz	\$	270.25	\$ 205.50	/ pt
#12420	2.00 - 2.49	\$	71.75	\$	143.75	9	102.25	/ 4 oz	\$	289.00	\$ 224.25	/ pt
#12430	2.50 - 2.94	\$	71.75	\$	143.75	\$	102.25	/ 4 oz	\$	289.00	\$ 224.25	/ pt
#12440	2.95 - 2.99	\$	76.25	\$	155.25	9	110.75	/ 4 oz	\$	325.00	\$ 255.75	/ pt
#12450	3.00 - 3.04	\$	88.00	\$	181.25	\$	132.25	/ 4 oz	\$	411.00	\$ 336.25	/ pt
#12460	3.05 - 3.09	\$	95.00	\$	199.75	\$	146.75	/ 4 oz	\$	466.75	\$ 393.75	/ pt
#12470	3.10 - 3.14	\$	103.75	\$	237.00	\$	182.75	/ 4 oz	\$	590.75	\$ 517.25	/ pt
#12480	3.15 - 3.19	\$	113.50	\$	267.50	\$	208.25	/ 4 oz	\$	787.25	\$ 597.75	/ pt
#12490	3.20 - 3.24	\$	116.75	\$	290.25	\$	228.50	/ 4 oz	\$	754.25	\$ 672.50	/ pt
#12491	3.25 - 3.31	\$	132.25	\$	330.50	\$	263.00	/ 4 oz	\$	886.50	\$ 794,50	/ pt

<sup>\*</sup> For other temperatures & tolerances, see ADJUSTMENT CHARGES

## UNCALIBRATED HEAVY LIQUIDS for ADJUSTING ORGANIC SERIES LIQUIDS PRICE PER LIQUID

Cat. No.	Density: g/cc	<u>1 oz</u>	. (30cc)	<u>4 oz</u>	. (120cc)	2 x	4 oz.(24	10cc)	<u>1 pt.</u>	(475cc)		2 x1pt.(	950cc)
#12800 #12802	.80 approx.	\$ \$	62.00 62.00		90.75 90.75		76.25 76.25		•	182.00 182.00	\$ \$	129.25 129.25	
#12804	3.31 approx.	\$	92.00		222.75		205.50		\$	734.25	\$	659.00	

CAUTION: Take normal precautions against contact and inhalation of halogenated organics

NOTE:

Formulated from organic liquids. Low end member is stable and non-toxic.

High end members are halogenated organic compounds. Miscible with most organic solvents.

HL-PL-198

Replaces: HL-PL-197A Effective: January 15, 2022

## CARGILLE PRECISION-CALIBRATED HEAVY LIQUID SETS

For mineralogists and gemologists, three sets of Heavy Liquids are available for quick, easy identifications, or classifying and separating specimens into groups. About 15cc of Organic Series Heavy Liquids, supplied in convenient wide mouth bottles.

Calibrated to ± .005 g/cc. Note: Much tighter tolerances than sets available elsewhere.

Cat. No.	CARGILLE F	PRECISION HEAVY LIQUI	D SETS - 30 cc's EAC	CH LIQUID	<u> </u>	Price /Set
#12806	Adjusting Liquid f	or: Gemology Sets #1 and #2	, Mineralogy Sets and Organic			
			(2 liquids: approximat	ely D = 1.00, D = 3.31 +	)	\$ 150.75
#12840	Gemology Heavy	Liquid Set #1	( 5 liquids )			\$ 398.00
#12850	Gemology Heavy	Liquid Set #2	( 10 liquids )			\$ 729.75
#12860	Mineralogy Heavy	Liquid Set	( 7 liquids )			\$ 466.75
#12870	Mineralogy / Gem	ology #2 Heavy Liquid Set	( 13 liquids )			\$1,132.00
	DENSITIES IN SE	TS AND EAC	H PRICE FOR INDIVIDUA		· · · · · · · · · · · · · · · · · · ·	
Cat.#	Density	Gemology Set #1	Gemology Set #2	Mineralogy	Set	Per 1 Fluid Oz
12410	1.20	44	1.20	w -		\$ 70.50
	1.36	**	1.36			
	1.48	22	144	1.48		
	1.75		1.75	1.75		
12420	2.00		2.00	2.00		\$ 71.75
	2.25	E E	2.25			
	2.33			2.33		
	2.43		2.43			
12430	2.57	2.57	793	2.40		\$ 71.75
	2.60	230	2.60	2.60		
	2.62	2.62	**	n. m		
	2.67	2.67				
	2.87		2.87			
12450	3.00		· · -	3.00		\$ 88.00
12460	3.05	3.05				\$ 95.00
	3.09		3.09	FF.		
12491	3.30		3.30	3.30		\$132.25
	3.31	3.31				
Cat. No		ADJUSTME	ENT CHARGES			
#12610	TEMPERATURE	E CHARGE (23 °C is stand	dard) 18 °C to 30 °C:			\$123.25
	For other tempe	ratures, readings and / or	coefficients - contact the Ca	argille Technical Depa	rtment	
	TOL	ERANCE SPECIFIED		ADDED CHARGE		
8227				-1-		
		±0.005		n/c		
#12609		±0.0005		\$ 95.00		
Cat. No.	ACCESSORIE	e e		EACH	1 pkg of 6	2 or more
#12911		ainless Steel, serrated, 51/2	"lang (440 mm)	\$ 10.00	\$ 9,25	2 of more
#12911	IVVEEZERS, SI	ainiess Steel, serrated, 572	i long (140 mm)	\$ 10.00	Ψ 9.20	
#12925	WIDE MOUTH	GLASS JARS, with CHEMI	CAL-RESISTANT POLY S	EAL LINED		
	PL	ASTIC SCREW CAPS: 1 oz. (30cc), 1-3/8" o.d. x	2-5/8" h. (35 x 67 mm)		\$ 47.75	\$ 39.75
#12930	MINIMU	FOB & SHIPPING PO IN ORDER - USA, CANAD	CAP, 16 oz., 21mm, ID mo DINT: CEDAR GROVE, NJ A, MEXICO: \$ 50.00 MS / PRICES SUBJECT TO	07009 - USA INTERNATIONAL:		\$ 39.75

## CARGILLE LABORATORIES

55 Commerce Road • Cedar Grove NJ 07009-1289 • USA
Ph: (973) 239-6633 8:15 AM - 4:45PM M-Th 8:00 AM - 12:00 PM Fri. ET
FAX: (973) 239-6096 • WWW.CARGILLE.COM

## SINK-FLOAT STANDARDS


## For Measuring and Monitoring Liquid Densities

Sink-Float Standards are weighted, hermetically sealed, amber glass capsules for visually measuring and monitoring the density of liquids. Each Sink-Float Standard is precisely calibrated at 23°C (73.4°F) to measure a specific density of a liquid within a 0.7 gm/cc to 7.50 gm/cc range. The Standards are ¼" (6.4 mm) in diameter and usually ¾" (19 mm) in length; for higher densities, the lengths may be longer. Each Sink-Float Standard is also permanently marked for identification.

Density is determined by simply observing the position of a Sink-Float Standard in a liquid. When a Sink-Float is swirled in a liquid and thoroughly wet, it will either float in a more dense medium, sink in a less dense medium or stay suspended when the densities match. Continuous monitoring of liquid densities is performed by keeping a Sink-Float in the liquid. Since a Sink-Float will have a normal position (up, down or suspended), any change of position will signal a change in density.



"Sink-Finet" suspended in dennity liquid indicates that and liquid match.



A pair of "Sink-Phonts" selected for density limits. If both sink or flort, liquid is out of allowable tange.

#### METHODS OF USING SINK-FLOATS

#### **BEAKER METHOD**

The most common technique for using Sink-Floats is the "beaker" method. A transparent container such as a lab beaker, cylinder, or battery jar is employed to hold the density liquid, or filled with product for quality control testing.

In general, where a series of separations are to be made by adjusting the liquid, it is better to start with a low density. The surface can then be skimmed to separate the floatsam from the sinksam. After increasing density, the surface can be skimmed again to remove new floaters. A series of Sink-Floats makes adjusting the liquid, by bringing the next heavier Sink-Float into suspension, a simple procedure.

#### **SEMI-CONTINUOUS MONITORING**

This method is primarily for use with tank and piping systems. When frequent testing is required, it may

justify setting up a vertical sight gauge to contain the Sink-Floats. If flow cannot be stopped long enough for the Sink-Floats to indicate the density, a by-pass can be arranged.

Tanks or pipes equipped with bypasses must provide continuous flow through the by-pass so the sample in the Sink-Float chamber is the same as in the tank or pipe line.

To make a density determination, close valves or shut off mixers, or other agitating systems, to permit the test chamber to come to equilibrium and the Sink-Floats to respond to the density of the liquid.

The sight gauge system must be equipped with screens to prevent the Sink-Floats from being washed through. For accurate testing, the temperature of the batch, or at least the test section must be controlled. Broader temperatures are allowed if three or more floats are used as described.



## USING ONE, TWO, OR MORE SINK-FLOATS

#### ONE SINK-FLOAT

- (a) Gives the most accurate control when kept suspended in the sliquid.
- (b) Indicates minimum density when liquid is higher. A drop in liquid density causes Sink-Float to sink.
- (c) Indicates maximum density when liquid is lower. A rise in density causes the Sink-Float to float.

#### TWO SINK-FLOATS

Sink-Floats indicate when a liquid changes beyond the minimum or maximum when a density range is permissible. For a liquid within limits, one Sink-Float sinks, the other floats. If both sink or float, liquid is beyond limits.

#### THREE SINK-FLOATS, OR MORE

(a) The density of a liquid will vary with temperature. Rather than take time to bring temperature of a liquid or liquid product to the standard temperature, select Sink-Floats for the test at the liquid temperature. A table can show the Sink-Floats to be selected.

TYPICAL TABLE									
SMK-FLOAT, pm/ec									
2.225									
2.220									
2.215									
2.210									

EXAMPLE: Liquid is 75°F, Sink-Floats 2.215 and 2.220 would be used as minimum and maximum limits for acceptance.

NOTE: If 4 Sink-Floats are used as listed in table, all can be put in the test liquid. For 75°F the density would be satisfactory if two sink and two float,

(b) A series of Sink-Floats can also be used to adjust a liquid through steps for a series of skim separation. If all Sink-Floats are put in the container and the lowest density is used first, as the density is raised to the next point, one Sink-Float will become suspended.

@ Cogille Laboratories, Inc.



Density Liquids, atthough correct when made or purchased, are subject to change due to evaporation or contamination. They can also be "off" if not used at the proper temperature, in the ambient temperature range, Sint-Floats, for practical purposes, are temperature stable.

## APPLICATIONS

## MAKING AND ADJUSTING DENSITY LIQUIDS

Density liquids can be made by mixing appropriately selected liquids until the proper Sink-Float remains suspended in the liquid. The same Standard can be left in the liquid as a monitor, and adjustments made by adding the appropriate end member or varying the temperature if the density of the liquid should change.

#### SEPARATION

EXAMPLE: Separating gems. Since the possibilities are known, a density liquid or series of liquids can be selected that lie between the densities of the gems being separated.

A single Sink-Ftoat will control the tiquid, but a pair will require less operator attention. The pair should be selected to give the widest range for variation of the liquid consistent with clean separation between types of stones.

#### **IDENTIFICATION**

EXAMPLE: Diamonds. If in the extraction process a number of crystalline materials are found and the diamond is wanted to the exclusion of all other materials, two liquids would be required. If the diamonds range from 3.50 to 3.54, a liquid of 3.50 would float any crystals of lower density and the diamonds would sink. In liquid of 3.54 the diamonds would float and heavier materials would sink.

#### CONCENTRATION CONTROL

EXAMPLE: Solution preparation. When a solution is to be prepared from a concentrate, and the diluent has a different density than the concentrate, the concentration may be controlled by density, using one or a pair of Sink-Floats.

#### CONTAMINATION CONTROL

Materials being separated by a density liquid may carry minute amounts of liquids into the density liquid. Monitoring with Sink-Floats will indicate a change in density due to addition of the contaminants.

#### **PRODUCT CONTROL**

EXAMPLE: Liquid product to be separated from solvent. Where a solvent process is used in manufacture and the solvent is distilled off, a Sink-

First can be used to indicate when a minimum density or maximum density is reached. The accuracy-depends on the density difference between the solvent and the product. Distillation would continue until a Sint-Float just sinks, just floats, stays suspended, or, using a pair to establish an acceptance density range, one sinks and one floats.

#### **PURITY CONTROL**

When a liquid product's purity can be related to maximum or minimum density, an appropriately selected Sint-Float will indicate whether the desired purity has been reached, or has changed by contamination or detarloration.

#### **QUALITY CONTROL**

EXAMPLE: Dielectric properties of ceramic parts. Porosity (air inclusion) of pressed parts affect dielectric constants. By use of density liquids, parts with excessive air inclusions can be separated. One Sink-Float would give critical control; a pair of Sink-Floats would allow a small range of control of the liquid that would reduce operator time in adjusting the density liquid, and yet avoid the possibility of extreme change of density liquid without operator knowledge.

## REACTION CONCENTRATION CONTROL

When a reaction process consumes a material in solution and the drop in concentration changes density, a test with a properly selected Sink-Float will show when concentration has dropped below minimum level.

#### **SOLDER FLUXES**

The solvents and diluents in fluxes used with automatic soldering equipment slowly evaporate during use and must be replaced to maintain uniform fluidity. Also, the flux solids are depleted during application and must be replaced. Density is commonly used to control fluidity since there are measurable differences between the stable (denser) components and the lighter solvent. Sink-Floats are used to monitor densities and to immediately alert the user to a change in density and that fluidity may be approaching a "problem level".

## SUGGESTIONS FOR ACCURACY

- Temperature changes cause density changes in liquids. The operator must know the degree to which a temperature change will affect his result. Density varies inversely with temperature.
- The simplest method of temperature control is to standardize tests, when possible, at average room temperature. Any adjustments, if they must be made, are then minor.
- 3. Changing the temperature of the liquid can be avoided by preparing a table and using several Sink-Floats. Once the temperature of the liquid is taken, the appropriate Sink-Floats can be selected. A liquid product can then be tested, or a test liquid adjusted by addition of end members. See typical table.
- 4. A liquid can be protected from sharp temperature changes caused by air circulation or cold drafts by purting the beaker inside a larger beaker. Greater temperature stability is achieved by filling the space between the beakers with water or clean oils. This technique also assists when tests are conducted at elevated or lowered temperatures.
- 5. Faster response to the density of the liquid can be accomplished by stirring or swirling the liquid and watching the Sink-Floats come to equilibrium.
- 6. Small changes in density can be made by changing the temperature of the liquid. This avoids constant additions to adjust the liquid. Sink-Floats will indicate when the new density has been reached.
- 7. For a given low viscosity liquid an operator can develop a test for the density difference indicated by the rate a Sink-Float may rise or drop. This technique can be used to keep a liquid within a narrow range with one Sink-Float, or to keep the temperature of the liquid within a narrow range.

## SELECTING

Most commonly used Sink-Floats are in the range .700 to 3.00 gm/cc. These are also the most readily available and the least expensive.

A tolerance of  $\pm 0.005$  is the most widely used, having proved highly satisfactory for quality control teating, identification and separation work.

The most precise Sink-Floats, having a tolerance of ±0.0005, are generally used in research, and precision analytical work, or where concentration, contamination and purity control is dependent on very minor density changes.

Sink-Floats are stocked by intervals dependent on the tolerance as follows:

TOLERANCE	SMALLEST INTERVAL	EXAMPLE OF SERIES
±0.01	-0.01	4.00, 4.01, 4.02
±0.005	0.005	2.000, 2.005, 2.010
±0.0005	0.0005	2.0000, 2.0005, 2.0010

For control of a liquid with one Sink-Float, order one matching the density of the liquid.

For control of a liquid with a pair of Sink-Floats, order one above and one below the liquid density, representing minimum and maximum limits.

For series separations, or product density quality control at the temperature of the product, the proper series of Sink-Floats must be selected according to the application.

Sink-Floats are available with densities from 0.70 to 7.5 gm/cc. Available tolerances vary with the density of the Sink-Float. Tolerance is indicated by an extra mark above or below density number, as follows:

RANGE, palce	TOLERANCE	EXTRA MARK
0.700 to 4.00	±0.005	None
0.700 to 4.00	±0.0005	Below No.
4.000 to 7.50	±0.01	Above No.

#### **SPECIFICATIONS**

Weighted, hermetically sealed, amber glass capsules; ¼" (6.4 mm) OD, ¾" (19 mm) long, slightly longer for higher densities; permanently marked for identification; precisely calibrated at 23°C (73.4°F) unless otherwise specified.

### ORDERING INFORMATION

Sink-Floats are usually selected to meet specific density figuld monitoring or individual liquid density requirements by ordering singly, in pairs, or in series by Catalog No. PURCHASE ORDERS MUST SPECIFY EXACT DENSITY AND TOLERANCE. IF TOLERANCE IS OMITTED, THE WIDEST TOLERANCE WILL SE SUPPLIED.

#### SINK-FLOAT SCREENING SETS

To meet the needs of research, development, and test laboratories the Sink-Float Screening Sets, listed below, are available in series commonly used in making quick estimates of densities.

CATALOG No. 13550, SINK-FLOAT SCREENING SET . WIDE RANGE—7 Standards—1.00 to 4.00 gm/cc—interval 0.5--Tolerance.±0.005

CATALOG No. 13600, SIMK-FLOAT SCREENING SET . LIMITED RANGE—9 Standards—1.00 to 3.00 gm/cc--interval 0.25—Tolerance ±0.005

CATALOG No. 13650, SINK-FLOAT SCREENING SET • COMMON RANGE—11 Standards—1.00 to 2.00 gm/cc—Interval 0.1—Tolerance ±0.005

Replaces: SFS-PL-197A Effective: January 15, 2022



## **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

## SINK FLOAT STANDARDS PRICE LIST

#### INDIVIDUAL STANDARDS

IMPORTANT: SPECIFY DENSITY (in gm / cc) AND TOLERANCE FOR EACH SINK FLOAT STANDARD

NOTE:

A 15% discount from the price of an individual standard will be granted if the last number specified

is not "0" or a "5"

CAT.#	DENSITY, gm/cc	LINE INDICATES TOLERANCE				
			±0.01	±0.005	±0.0005	
13110	0.70 to 1.00		xxx	\$ 213.50	\$ 350.50	
13120	1.01 to 2.00		xxx	\$ 214.75	\$ 328.75	
13130	2.01 to 3.00	xxx		\$ 328.75	\$ 546.25	
13140	3.01 to 4.00	XXX		\$ 306.25	\$ 489.00	
13150	4.01 to 5.00	\$	489.75	xxx	xxx	
13160	5.01 to 6.00	\$	580.75	XXX	XXX	
13170	6.01 to 7.00	\$	636.75	xxx	XXX	
13180	7.01 to 7.50	\$	732.75	XXX	XXX	

Please inquire for quantity discount of more than 3 Sink Floats with the same density and temperature.

SINK-FLOAT SETS THE PRECISE DENSITY OF A SINK FLOAT STANDARD WITHIN A SET MAY NOT END IN A "0" OR A "5". HOWEVER, ITS PRECISE DENSITY WILL BE CLEARLY MARKED AND CALIBRATED WITHIN THE CHOSEN TOLERANCE (i.e. A nominal 1.00 gm/cc Standard for Set #13550 will be marked with its density within its tolerance so

its density will be a number between .995 and 1.005 and marked as to its actual density).

WIDE-RANGE 7 STANDARDS; 1.00 to 4.00 gm/cc; Interval 0.5 CAT # 13550 ± 0.005 \$ 1,498.50 \$ 2,284.50 CAT # 13551 ± 0.0005 CAT # 13600 ± 0.005 \$ 1.855.25 LIMITED RANGE - 9 STANDARDS; 1.00 to 3.00 gm/cc; Interval 0.25: CAT # 13601 ± 0.0005 \$3,006.75 COMMON RANGE - 11 STANDARDS; 1.00 to 2.00 gm/cc; Interval 0.1: CAT # 13650 ± 0.005 \$1,781.25 CAT # 13651 ± 0.0005 \$2,889.50

STANDARD TEMPERATURE: CALIBRATION WILL BE AT 23 °C UNLESS ANOTHER TEMPERATURE IS SPECIFIED. SEE BELOW TEMPERATURE ADJUSTMENT CHARGE: For a temperature other than 23°C (18°C to 30°C): (For each combination density-temperature specification in a single order)

# **CARGILLE LABORATORIES**

# **IMMERSION OILS**



FOR THE SHARPEST IMAGE POSSIBLE



## Research Quality Is Our Standard

## Check Cargille's Record

Since 1924, Cargille Laboratories has been providing specialized services to a broad range of laboratory sciences. Advances for the microscopy field continually develop from Cargille Laboratories' extensive research, among them many significant achievements:

<ul> <li>First NON-DRYING immersion oil</li> </ul>	1940
• First HIGH-VISCOSITY immersion oil	1950
<ul> <li>First PCB-FREE immersion oils</li> </ul>	1971
<ul> <li>First ULTRA LOW-FLUORESCENCE</li> </ul>	
immersion oil	1984
First Ultra Low-Fluorescence	
HALOGEN-FREE immersion oil	1992
• First 37DF immersion oil	2008
First LIVE CELL FLUORESCENCE	
immersion oil at 37°C	2009

Key optical characteristics make immersion oil function as a high quality component of the optics of the microscope. Cargille Laboratories was the first manufacturer to print key optical and physical values on every bottle of immersion oil. This makes referencing the data, and the selection process, easy and accurate.

This selection process is further simplified in the lab by color coding all bottle and package labels.

Today, Cargille Immersion Oils are accepted by all microscope manufacturers. Cargille provides the largest line of immersion oils for traditional and specialty uses, and continues to set performance standards in product development, refinement and support services.

## Cargille Immersion Oils Meet or Exceed the ISO 8036-1 Standard

The required specifications for immersion oil are in the International Standards Organization (ISO) 8036-1 which incorporates and supersedes the DIN 58 884. All but three of Cargille Immersion Oils meet the ISO standards. The other three Cargille oils are for more highly specialized applications and used in non-standard conditions not yet addressed by ISO requirements.

Cargille Laboratories served as a member of the U. S. delegation to the International Standards Organization and helped write the ISO specifications for immersion oils in conjunction with microscope manufacturers worldwide.

## Biosciences, Clinical, Hematology and Pathology Labs

Specifications for Cargille Immersion Oils also meet the U.S. FDA criteria for *In Vitro* Diagnostics, General Purpose Reagents, and have been adopted for use by the U.S. Department of Defense.

The physical and optical properties of immersion oil are critical to the proper operation of Automated Hematology Systems. Type 300 is designed and manufactured to meet the stringent requirements of this equipment, which include specialized viscosity and exacting controls for its consistency.

Types A and B are sufficiently low fluorescing for most fluorescence microscopy applications. Extremely low fluorescence is achieved by Type DF. Type FF is virtually fluorescence-free, though not covered by ISO. Viscosity for Type A is 150 cSt, Type B is 1250 cSt, Type DF is 330 cSt and Type FF is 170 cSt.

Type 37DF was developed specially for research projects that require Fluorescence Microscopy at internal human body temperature. Type 37DF, with a refractive index of Co 15 and viscosity of 250 cSt at 37°C, solves the problem of image deterioration at temperatures above the standard calibration temperature of 23 °C.





## What Application – What Type – Which One to Choose?

Normal Light Microscopy:	Use Type A or Type B	Types A and B are virtually interchangeable and are miscible with each other for intermediate viscosities. Produced in larger quantities than other types, Types A and B are the most economical. The deciding factor in choosing between them is the optimum viscosity for your particular application. (Please refer to the chart of Relative Viscosities on page 3.)  Type A, at 150 centistokes, reduces any tendency to trap air, especially helpful to beginning students. Air bubbles cause image degradation.  Type B, at 1250 cSt, is thick enough for viewing multiple slides with one application. This saves time during batch processing.
Automated Hematology Systems:	Use Type 300	AUTOMATED HEMATOLOGY SYSTEMS depend on accurate, precisely controlled physical and optical properties of immersion oil for successful imaging and mechanical processing. Type 300 is designed and manufactured to meet the stringent requirements of this equipment, which include specialized viscosity and exacting controls for its consistency.
Inverted, Inclined, Projection, and Long Focus Instruments:	Use Type NVH or Type OVH	The greater the gap between the cover glass and objective, or between the slide and condenser, the more desirable high viscosity becomes. The very high viscosities of Type NVH at 21,000 cSt and Type OVH at 46,000 cSt give excellent results for these applications.
Blending Oils from the Miscible Group of immersion oils to obtain intermediate viscosities:	The Miscible Group of immersion oils is A, B, 300, NVH & OVH.	Users can easily blend any two immersion oils from the Miscible Group to obtain an immersion oil with an intermediate viscosity while maintaining the optical properties common to both oils.
Fluorescence Microscopy:	Use Ultra-Low Fluorescing Type DF, Type HF, Type FF or Type 37DF	Extremely low fluorescence is achieved by <u>Type HF.</u> FF is virtually fluorescence-free, though not ISO complia  Type HF is halogen-free. For most non-critical fluoresce microscopy applications, <u>Types A and B</u> are sufficiently leftuorescing. Viscosities for <u>Types HF and FF</u> are 700 cS and 170 cSt, respectively. <u>Types A and B</u> are 150 cSt at 1250 cSt.
Elevated Temperatures (>23 °C to 37 °C)	Use Type 37*	Elevated temperatures can be due to substage illuminators, "hot stage", or other causes – ideal situations for Cargille Immersion Oil Type 37. Developed specifically for working at human body* temperatures, Type 37 has a refractive index of 1.515 and a viscosity of 1250 cSt at 37 °C, solving the problem of image degradation above the standard calibration temperature of 23 °C.
		Blending for Intermediate Working Temperatures From 23 °C to 37 °C
		Harmonia International Control of the Control of th



Users can blend for their own working temperature; blending Type B, with a viscosity of 1250 cSt at 23 °C with Type 37, 1250 cSt at 37 °C maintains a constant 1250 cSt viscosity and optical values and places the temperature of calibration proportionally between 23 °C to 37 °C.


(\*For In Vitro use only: immersion oil has no In Vivo applications.)



## **How Immersion Oils Work**

Sharper resolution and increased brightness are achieved with oil immersion microscopy:

- An objective must be used "dry" or "oiled" depending on design, and is marked specifically for use with oil. A condenser will work oiled or dry.
- The glass of the objective and condenser lenses and the slide and cover glass each have a refractive index of 1.515. Air has a refractive index of 1.000 and is a distorting factor.
- 3. By replacing the air gap between the condenser and slide and between the slide and objective with immersion oil with a refractive index of 1.515, the best resolution of the image is realized.
- Cargille Immersion Oil has the specific refractive dispersion necessary to reduce chromatic aberration and maintain the proper color of the image.



For a more detailed explanation of the physics, optical contribution, and use of immersion oil, including angular and numerical apertures, request a free copy of the booklet *Immersion Oil and the Microscope* by John J. Cargille, reprinted by permission of the New York Microscopical Society.



Re	Relative Viscosities								
Viscosity In Centistokes	Cargif <del>le</del> Immersion Oil Type	Common Liquids	Viscosity In Centistokes						
-	_	water salad oil	1 cSt						
			50 cSt						
150 cSt	TYPE A	maple syrup	165 cSt						
170 cSt	TYPE FF	dish detergent	225 cSt						
250 cSt	TYPE 37DF*	motor oil 10W	225 cSt						
300 cSt	TYPE 300	motor oil 30W	285 cSt						
330 cSt	TYPE DF	glycerin	550 cSt						
1,250 cSt	TYPE B	com syrup	1,760 cSt						
1,250 cSt	TYPE 37*	molasses	2,500 cSt						
21,000 cSt	TYPE NVH	honey	15,000 cSt						
46,000 cSt	TYPE OVH	(3.07 x honey)							

<sup>\*@ 37 °</sup>C.

## Special Applications of Cargille Immersion Oils

Worldwide distribution and rigidly maintained manufacturing specifications allow Cargille Immersion Oils to be used at coordinated work sites around the globe with thoroughly consistent quality results for applications such as:

- temporary mounting media
- fluid mount (permitting specimen rotation)
- calibration liquids
- optical coupling
- transparency medium for translucent materials and as a filter clearing agent. (recommended by Millipore Corp.)





## Optical and Physical Properties

Property values most often requested

Category:		Standard	Viscosit	ies	Ext	ra Thick		Fluores Micros	сору	Halogen- Free
Type of Oil:	Type A	Type 300	Type B	Type 37**	Type NVH	Type OVH	Type 370F	** Type	DF Type FF	Type HF
Miscible Group:	yes	yes	yes	n/a	yes	yes	n/a	n/a	n/a	n/a
ISO Compliance:	yes	yes	yes	***	yes	yes	***	ye	S ****	yes
Catalog No.:	16482	16252	16484	16237	16485	16487	16239	162	2 16212	16245
Viscosity: cSt ± 10% @ 23 °C (centistokes)	150 low	300 medium	1250 high	(@ 37 °C) 1250** high	21,000 very high	46,000 very,very high	(@ 37 °C) 250 medium	33 medi		approx 700 medium
Refractive Index @ 23 °C: F Line (4861 Å) E Line (5461 Å) D Line (5893 Å) C.Line (6563 Å)	1 5239 1 5180 1 5150 1 5114	1.5238 1.5180 1.5150 1.5115	1.5236 1.5180 1.5150 1.5116	(@ 37 °C) 1.5238** 1.5180** 1.5150** 1.5115**	1.5230 1.5178 1.5150 1.5118	1.5230 1.5178 1.5150 1.5118	(@ 37 °C) 1.5233** 1.5179** 1.5150** 1.5117**	1 52 1 51 1 51 1 51	79 1.4811 50 1.4790	1.5234 1.5180 1.5150 1.5117
Dispersion: n <sub>F</sub> - n <sub>C</sub> Abbe ∨ <sub>D</sub> Abbe ∨ <sub>e</sub>	0.0125 41.3 41.0	0.0123 41.8 41.5	0.0119 43.2 42.8	0.0123** 42.0** 41.7**	0.0113 45.7 45.4	0.0111 46.3 46.0	0.0116** 44.3** 44.0**	0.01 44. 44.	2 57.0	0.0118 43.8 43.6
Temperature Coefficient: (15-40 °C) dn <sub>D</sub> dt	-0.00033	-0.00033	-0 00031	-0.00035**	-0.00034	-0.00034	-0.00040**	-0.00	039 -0.00037	-0.00038
Stability: change in n <sub>0</sub> 25 °C after 24 hrs.@ temp. 60 °C: 100 °C:	0.0000 0.0000	0.0000	0.0000 0.0000	0.0000 0.0000	0.0000 0.0000	0.0000 0.0000	0 00 <b>0</b> 0 +0.00 <b>0</b> 2	0.00 +0.00		+0.0001 +0.0006
Fluorescence * (UV): Short Wave: Long Wave:	low low	low	. low	low	low low	low	very,very low very low	very,ver		very, very low very low
Color: (Gardner)	1	1	1	1	- 1	<3	<1	<1	<1	<1
Density: @ 23 °C g/cc: (US) lb/gal:	0.923 7.70	0.923 7.70	0.923 7.70	0.917 7.73	0.919 7.67	0.918 7.66	1.2494 10.43	1.22 10.2		0.9306 7.77
Cloud Point:	<-13 °C	<-13 °C	<-13 °C	<-13 °C	<-13 °C	<-13 °C	<-13 °C	<-6	°C <-6°C	2°C
Flash Point: COC *****	325 °F	325 °F	325 °F	325 °F	325 °F	340 °F	199°C/390	°F 390	°F 420 °F	>340 °F
Neutralization No. (mg KOH/g)	0.01 max	0.01 max	0.01 max	0.01 max	0.01 max	0.04 max	0.86 max	0.15 п	nax 0.01 max	0.03 max

<sup>\*</sup> Relative to Cedarwood Oil.

See Back Page For Additional Information And Technical Literature.



<sup>\*\*</sup> Values for Type 37 and 37DF standardized at 37 °C.

<sup>\*\*\*</sup> Meets ISO except for temperature.

<sup>\*\*\*\*</sup> Not ISO rated.

<sup>\*\*\*\*\*</sup> Cleveland Open Cup

Replaces: IO-PL 197A Effective: January 15, 2022



## CARGILLE IMMERSION OILS PRICE LIST

DESCRIPTION	CATALOG NO			PRICE P	ER BOTTLE		
DESCRIPTION	CATALOG NO.	1/4 (	oz. ††		1 oz. †	4 oz. †	16 oz. †
Type A	16482	ea:	\$ 10.25	ea:	\$12.00	\$ 26.00	\$ 52.50
Type B	16484	36:	\$ 6.50	doz:	\$10.50	\$ 23.00	\$ 47.25
		432:	\$ 6.25				
Type 300	16252	ea:	\$ 13.25	ea:	\$14.25	\$ 26.75	\$ 61.25
		36:	\$ 8.50	doz:	\$12.75	\$ 24.50	\$ 55.75
		432:	\$ 7.75				
Type NVH	16485	ea:	\$ 8.00	ea:	\$ 14.50	\$ 32.00	\$ 76.00
		36:	\$ 7.00	doz:	\$ 12.75	\$ 28.50	\$ 65.25
		432:	\$ 6.75				
Type FF	16212	ea:	\$ 11.25	ea:	\$ 14.75	\$ 32.75	\$ 77.75
		36:	\$ 6.75	doz:	\$ 13.75	\$ 29.75	\$ 70.00
		432:	\$ 6.25				
Type 37LDF	16240	ea:	\$ 12.00	ea:	\$ 17.50	\$ 36.25	\$ 84.50
Has distinct odor - req	uest (M)SDS	36:	\$ 7.50	doz:	\$ 15.25	\$ 32.75	\$ 76.25
		432:	\$ 6.75				
Type LDF	16241	ea:	\$ 13.50	ea:	\$ 16.00	\$ 36.25	\$ 80.50
Has distinct odor - req	uest (M)SDS	36:	\$ 8.25	doz:	\$ 14.25	\$ 32.75	\$ 72.75
		432:	\$ 7.75			_	
These products ar	re not available in 1/4 oz	z. bottles					
Type HF	16245			ea:	\$ 16.00	\$ 34.25	\$ 80.50
· ·				doz:	\$ 14.25	\$ 31.00	\$ 72.75
Type 37	16237			ea:	\$ 15.00	\$ 32.00	\$ 86.75
1 ype or	10201			doz:	\$ 13.50	\$ 28.50	\$ 74.75
Type OVH	16487			ea:	\$ 15.50	\$ 33.25	\$ 90.25
Type Ovn	10401			doz:	\$ 14.00	\$ 29.50	\$ 77.50
			† 4	mber glass			ylene bottles

Immersion Oil and the Microscope, by John J. Cargille, original reprinted from the 1964 New York Microscopical Society

In an update 1985 Second Edition®, Cargille Labs has a simple but comprehensive discussion of why Immersion Oils are necessary, their function, and their wide use in schools and laboratories for teaching students and technicians.

Free reprint are available at www.Cargille.com

SAMPLER: Poly-Pak	16490	ea:	\$ 26.00
5 x 1/4 fl. oz. polyethylene bi	tis:	doz:	\$ 22.75
( 2 ea: Type A			
1 ea: Types: 300, B, NVI	Η)		
Dispensing Bottles:			
with glass applicator rods			
1/4 oz.	18507	doz:	\$ 36.00
1 oz.	18506	doz:	\$ 36.25

#### **FOB & SHIPPING POINT:**

Cedar Grove, NJ 07009 USA

Minimum Order:

USA, Canada, Mexico: \$50.00

International: \$ 70.00

See Sales Policy for full terms.

Prices Subject to Change Without Notice.

## CARGILLE LABORATORIES

55 Commerce Road • Cedar Grove NJ 07009-1289 • USA *Tel:* 973-239-6633 • Fax: 973-239-6096

WWW.CARGILLE.COM

# REFRACTIVE INDEX LIQUIDS Cargille



RI-0987

## CARGILLE REFRACTIVE INDEX LIOUIDS

Cargille Refractive Index (R.I.) Liquids / Optical Liquids have become standard tools in many laboratories as their applications have expanded from mineralogical identification. Broader as well as more specialized uses in many more fields such as chemicals, engineering, biology, forensic, optics and instrumentation are continuously developing. Special requirements for new applications have created a need for more technical data, new formulations, extended ranges, smaller increments and higher degrees of accuracy.

The largest and most comprehensive assemblage of refractive index liquids - over 250 stocked items - is available for Geo Sciences, Industry, Biology, Optics, Forensics and Education. Many more are custom formulated. Materials research is ongoing in anticipation of new requirements. Since 1942, Cargille Laboratories has developed new materials to meet these challenges.

Chlorofluorocarbon ( CFCs ) components if used in Cargille Refractive Index / Optical Liquids ( Series AAA and Laser Liquid Code 3421 ) have physical properties that are harmless to the ozone layer, unlike those found in refrigerant gases, propellants and solvents, which are destructive. The components used by Cargille Laboratories have vapor densities ten times that of air, are relatively nonvolatile, and have boiling points at least 100 °C higher than the highest boiling CFC listed for removal from commercial use by the Montreal Protocol.

## CLASSIFICATIONS

1.	*STANDARD REFRACTIVE INDEX LIQUIDS	Pg.2	2.	CUSTOM LIQUIDS	Pg.3
	A. REFRACIVE INDEX STANDARDS B. HIGH DISPERSION GROUP	Pg.2 Pg.3		A STANDARD IMMERSION LIQUIDS B. IMMERSION LIQUID SPECIALS C. LASER LIQUIDS™	Pg.3 Pg.3 Pg.4

3.	FUSED SILICA & BK-7 GLASS MATCHING LIQUID	Pg.4
4.	MASTER CALIBRATION LIQUIDS	Pg.4
5.	MELTMOUNTS™ Mounting Media & Quick-Sticks	Pg.4.
6.	OPTICAL GELS	Pg.4
7.	SOLID REFRACTIVE INDEX STANDARDS	Pg.4

<sup>\*</sup>Complete groups, partial sets, or individual refractive index liquids may be purchased. Request Price List if not included.

## APPLICATIONS

PARTICLE IDENTIFICATION and

**OPTICAL ANALYSIS** 

Specimen fragments, minerals, ores, chemicals, plastics, gems, Identify translucent or transparent solids by microscopic immersion techniques, such as Becke i.ine, dispersion/optical staining. focal masking and double variation refractometry techniques.

FIBER OPTICS

Liquids and Gels used for fiber optic connections and mode stripping.

MOUNTING MEDIA

Temporarily mount specimens in various index media for Matching or Contrasting index combinations. Mount specimens in stable, non-drying index of refraction liquid to permit sample rotation by shifting cover glass for more comprehensive examination. See Cargille MELTMOUNTS™ pg. 4

Telephone: (973) 239-6633

8:15AM - 4:45PM ET MON-THURS

8:00AM - 12:00PM ET FRI

Fax: (973) 239-6096 24-hours

WWW.CARGILLE.COM



Calibrate refractometers and other optical instruments. REFRACTOMETRY See MASTER CALIBRATION LIQUIDS pg.4 Instruct and demonstrate principles and applications of refraction & optics **EDUCATION** Examine stress and strain effects on transparent or translucent items, STRAIN ANALYSIS molded, formed, curved or intrinsically shaped parts by polariscopic See Cargille IMMERSION LIQUIDS pg.3 immersion technique. Couple optical elements with liquids and geis formulated to reduce or OPTICAL COUPLING eliminate reflection losses. Fill hollow lens / prisms with index of refraction liquids and obtain unique **OPTICAL LENSES** optical / dispersion properties at lower cost than solid lens / prisms. Examine and preserve cathode coatings without stripping or re-immersion **ELECTRO-OPTICS** by utilizing liquids calibrated to match the index of crystais and glasses. Identify particles and particulates from air, water and soil. **POLLUTION** Photograph flow patterns by filling test system with refractive index liquids **FLUID FLOW** containing suspended "beads".

Standard Refractive Index Liquids Series AAA thru M & High Dispersion Series E are 15 read at 3 wavelengths in order to calculate dispersion, and the liquids are blended so that the dispersion always falls into a consistent range. These liquids are quality-controlled for dispersion and index. Refractive indices are stated for Refractive index liquids at 25 °C, illuminated by

REFRACTIVE INDEX LIQUID STANDARDS: Range: 1.300 to 2.11

589.3 nms / 5893 angstroms Sodium light.

Consists of 222 liquids divided into seven different Series. The three Certified Series cover the range of most minerals, chemicals, glasses and practically all biological materials.

Adjusted to ±0.0002 Int: 0.005 1.395 **SERIES AAA** Range 1.300 Slightly volatile, colorless chlorofluorocarbon formulation. Keep tightly capped. Adjusted to ±0.0002 1.400 1.458 Int. 0.002 Range to SERIES AA (Certified) Very stable, colorless 1.640 Int. 0.002 Adjusted to ±0.0002 1.460 to Range SERIES A (Certified) Stable, colorless at the low end, increasing to faint yellow\* at the high end. Adjusted to ±0.0002 Range 1.642 1.700 Int. 0.002 SERIES B (Certified) to Stability inversely related to increasing index. Color increases with index to yellow or yellow brown\*.

Adjusted to ±0.0005 Int. 0.005

to

Methylene iodide formulation, keep tightly capped. 1.740 to 1.780 liquids contain sulfur imparting yellow color\*. 1.785 to 1.800 liquids have tin lodide added, dark red color\* As methylene lodide evaporates, 1.705 to 1.735 liquids decrease in index. 1.740 liquids and up increase in index and may form crystals.

1.800

Telephone: (973) 239-6633

SERIES M

8:15AM - 4:45PM ET MON-THURS

8:00AM - 12:00PM ET FRI

Range 1.705

Fax: (973) 239-6096 24-hours

<sup>\*</sup> Color refers to appearance in bulk. All optical liquids are virtually colorless in thin layer.

RI-0987\_



These Liquids have been discontinued and we have limited stock available. Please call to check availability.

SERIES H Range 1.81 to 2.00 Int. 0.01 Adjusted to ±0.0015 Quite stable. Color varies from yellow to brown\*. Toxic and corrosive. A super-saturated solution. May crystallize with time and low temperature. Formulation: arsenic tribromide,

arsenic disulfide and sulfur.

SERIES EH Range 2.01 to 2.11 Int. 0.01 Adjusted to ±0.0015

Quite stable. Similar to Series H but contains selenium. Toxic and corrosive. Darker color\*, more viscous. Viscosity increases with index.

HIGH DISPERSION GROUP Range: 1.500 to 1.800:

Consists of 64 liquids (three combined Series). Use for dispersion/optical staining, focal masking and double variation refractometry. Series E is specially formulated for high dispersion. Series B-1/2 and M are from the Standard group and have suitable dispersion characteristics.

SERIES E Range 1.500 to 1.640 Int. 0.05 Adjusted to ±0.0005 Slightly volatile, keep tightly capped. Supplied with optical constants for F, D and C lines. Recommended by prominent microscopists who have developed and published these techniques.

SERIES B-1/2 Range 1.644 to 1.700 Int. 0.004 Adjusted to ±0.0002 Represents one-half of the B Series in the Standard group. Has high dispersion characteristics.

SERIES M Range 1.705 to 1.800 Int. 0.005 Adjusted to ±0.0005

The same Series M as in the Standard group. Has high dispersion characteristics.

2. Standard immersion Liquids, Immersion Liquid Specials & Laser Liquids™ are calibrated according to the customers' requirements, usually reading the index at 1 wavelength. These liquids are quality-controlled only for the customer-specified properties. If requested, typical dispersion data can be provided.

A. STANDARD IMMERSION LIQUIDS

Formulations similar to Standard Refractive Index Liquids, but less expensive; custom blended to a desired index between 1.400 and 1.700 at desired temperature and wavelength.

Consult Technical Department

**B. IMMERSION LIQUID SPECIALS** 

Custom blended formulations with properties that differ from Standard Immersion Liquids, making them preferable for certain specific applications

Consult Technical Department

C. LASER LIOUIDS™

Originally formulated for use with lasers, the use of these liquids has expanded to many optical applications for indices between 1.293 and 1.630 where maximum stability, inertness, transparency, and low toxicity are required.

Consult Technical Department

3. FUSED SILICA and BK-7 GLASS MATCHING LIQUID

Liquids match the refractive index of fused silica or BK-7 Glass at 632.8 nms and closely match it at other wavelengths.

Request Fused Silica Matching Liquid Code 50350 Typical Characteristics Request BK-7 Matching Liquid Code 81520 Typical Characteristics

Telephone: (973) 239-6633

8:15AM - 4:45PM ET MON-THURS

8:00AM - 12:00PM ET FRI

Fax: (973) 239-6096 24-hours

WWW.CARGILLE.COM



MASTER CALIBRATION LIQUIDS

Cargille Master Calibration Liquids are very stable, non-toxic liquids with refractive index measured to an accuracy of ±0.00005 (five-in-the-fifth-place) at various temperatures and wavelengths. NOTE: To make use of the unusually high accuracy of these refractive index measurements, the user will require knowledge of the working temperature to an accuracy of ± 0.02 °C or better. This is because liquids typically have a temperature co-efficient of -0.0004 refractive index units per 1 °C, so they will be affected by approximately 0.000008 (eight-in-the-sixth-place) refractive index units for each 0.02 °C difference in temperature. All measurements are NIST (formerly the National Bureau of Standards) traceable.

Consult Technical Department

MELTMOUNTS™ MOUNTING MEDIA Low melting (65 °C) thermo-plastic, indices 1.539, 1.582, 1.605, 1.662 (PCB-FREE replacement for Aroclor 5442), 1.680, and 1.704. Useful as a thermally reversible cement for making microscope slides and in other Request Data Sheet for MELTMOUNTS™ optical coupling applications.

OPTICAL GELS

Refractive indices of 1.46 and 1.52 for lens and fiber coupling and mode striping.

- SOLID REFRACTIVE INDEX STANDARDS supplied in a solid wood case. Sets of 58+ vials of powdered minerals and glasses -100 +200 mesh. Range: 1.34 to 2.40, most intervals near 0.01.
  - M-1 REFRACTIVE INDEX STANDARDS: ½ cc each of 60 optical glasses & minerals, refractive indices 1.34 to 2.40, 0.01 increments, R.I. value ± 0.01@ n<sub>D</sub>
  - M-7 PRECISION SOLID REFRACTIVE INDEX STANDARDS: ½ cc each of 58 Precision Optical Glasses, R.I. 1.34 to 2.40, 0.01 increments: set is accompanied by extensive technical data. R.I. values: ± 0.00005 in most instances @ 7 wavelengths.

Consult Technical Department

		. Odjour i odik odik
Γ	Catalog #	ACCESSORIES
	18505	REPRINT: "PRACTICAL REFRACTOMETRY BY MEANS OF THE MICROSCOPE", by Dr. Roy M. Allen. 48-page booklet describes basic methods; with 13 photomicrographs.
	40504	RACK Model RF-1. Solid wood with transparent rigid plastic cover. Contains four stepped rows for easily identifying R.I. numbers on labels. Each rack holds 51 x 7.4 cc bottles.

## ORDERING INFORMATION FOR STANDARD REFRACTIVE INDEX LIQUIDS

All Refractive Index Liquid Standards Sets are sold in 7.4 cc ( 1/4 fl.oz. ) in amber bottles with applicator caps.

Temperature co-efficients and dispersion values are printed on each label.

Liquids are standardized for the sodium (n<sub>D</sub>) line 589.3 nms / 5893 angstroms at 25 °C.

if any ½ sets have been ordered, the alternate half can be ordered to obtain a complete set. Individual Refractive Index Liquid Standards come in 7.4 cc (1/2 oz.) and 30 cc (1 oz.) amber bottles with applicator caps.

SEE PRICE LIST AND SALES POLICY FOR COMPLETE ORDERING INFORMATION

Telephone: (973) 239-6633

8:15AM - 4:45PM ET MON-THURS

8:00AM - 12:00PM ET FRI

Fax: (973) 239-6096 24-hours

WWW.CARGILLE.COM

Replaces: RI-PL-197A Effective: January 15, 2022

## **CARGILLE REFRACTIVE INDEX LIQUIDS PRICE LIST**

Refractive Index values stated are standardized at 589.3 nm and 25 °C

COMBINED SETS - CERTIFIED SERIES AA. A. & B RANGE 1.400 - 1.700	
Cat. No. 18001       RF-1       Full Set       Intl       0.002       151 liq         18002       RF-1/2       Half Set       Intl       0.004       76 liq         18002/Alt       RF-1/2       1.402 - 1.698       Intl       0.004       75 liq         18005       RF-1/5       Fifth Set       Intl       0.01       31 liq	\$ 1,921.25 \$ 1,921.25
CARGILLE STANDARD GROUP: 1.300 – 2.11	
Cat. No. SERIES AAA Range 1.300 - 1.395 Adjustment ±0.0002	
18031 AAA-1 Full Set 1ntl 0.005 20 liq	\$ 619.00 \$ 335.50 \$ 49.50 \$ 146.50
Cat. No. SERIES AA Range 1.400 - 1.458 Adjustment ±0.0002	
1000% [[	\$ 321.75
Cat. No. SERIES A Range 1.460 - 1.640 Adjustment ±0.0002	
18095 (1.460) A-1/5 Fifth Set Intl 0.01 19 liq 1809X A-x (std) 1/4 fl. oz (7 cc) Any liq selected	\$ 971.75
Cat. No. SERIES B Range 1.642 - 1.700 Adjustment ±0.0002	
18125 (1.650) B-1/5 Fifth Set Intl 0.01 6 liq 1812X B-x (std) 1/4 fl. oz (7 cc) Any liq selected	\$ 1,217.50 \$ 687.50 \$ 272.75 \$ 69.75 \$ 206.50
Cat. No. SERIES M Range 1.705 - 1.800 Adjustment ±0.0005	
18151       M-1       Full Set       Intl       0.005       20 liq       11         18152 (1.710)       M-1/2       Half Set       Intl       0.01       10 liq       10 liq         1815X       M-x       (std) 1/4 fl. oz (7 cc)       Any liq selected	\$ 455.25
1815Y M-xx	\$ 71.25 \$ 201.00

FOB & SHIPPING POINT: CEDAR GROVE, NJ 07009 - USA
MINIMUM ORDER - USA, CANADA, MEXICO: \$ 50.00 ← INTERNATIONAL: \$ 70.00
SEE SALES POLICY FOR FULL TERMS / PRICES SUBJECT TO CHANGE WITHOUT NOTICE

## CARGILLE LABORATORIES

55 Commerce Road • Cedar Grove NJ 07009-1289 • USA
Ph: (973) 239-6633 8:15 AM - 4:45PM M-Th 8:00 AM - 12:00 PM Fri. ET
FAX: (973) 239-6096 • WWW.CARGILLE.COM

Replaces: RI-PL-197A Effective: January 15, 2022

## CARGILLE REFRACTIVE INDEX LIQUIDS PRICE LIST

## CARGILLE HIGH DISPERSION GROUP

The Cargille High Dispersion Series are used when doing dispersion staining for identification of asbestos. Please note that Series A will not produce the colors needed in dispersion staining work for identifying asbestos. The Series E liquids were developed especially for this work and will produce the right colors.

Cat. No. SERIES E Range 1.500 - 1.640 Adjustment ±0.0005		
18431       E-1       Full Set       Intl       0.005       29 liq         18432 (1.500)       E-1/2       Half Set       Intl       0.01       15 liq         1843X       E-x       (std) 1/4 fl. oz (7 cc)       Any liq selected         1843Y       E-xx       1 fl. oz (30 cc)       Any liq selected	\$ \$	1,144.25 638.00 66.75 191.25
Cat. No.         SERIES B         Range         1.642 - 1.700         Adjustment ±0.0002           18122         B-1/2         Half Set         Intl         0.004         15 liq           18125         B-1/5         Fifth Set         Intl         0.01         6 liq	\$	687.50 272.75
Cat. No.         SERIES M         Range         1.705 - 1.800         Adjustment ±0.0005           18151         M-1         Full Set         Intl         0.005         20 liq           18152         M-1/2         Half Set         Intl         0.01         10 liq	\$	818.00 455.25

## COMBINED SETS - HIGH DISPERSION SERIES E. B. & M RANGE 1.500 - 1.800

Cat. No.	18461 HD-1 F	full Set Consists of E-1, B-1/2, & M-1	64 liq \$ 2,251.50
	18462 HD-1/2 H	Half Set Consists of E-1/2, B-1/5, & M-1/2	31 liq \$ 1,238.50

OB & SHIPPING POINT: CEDAR GROVE, NJ 07009 - USA
MINIMUM ORDER - USA, CANADA, MEXICO: \$ 50.00 ◆ INTERNATIONAL: \$ 70.00
SEE SALES POLICY FOR FULL TERMS / PRICES SUBJECT TO CHANGE WITHOUT NOTICE

## CARGILLE LABORATORIES

Replaces: RI-PL-197A Effective: January 15, 2022

## **CARGILLE REFRACTIVE INDEX LIQUIDS PRICE LIST**

## CARGILLE MASTER CALIBRATION LIQUIDS

See MASTER CALIBRATION LIQUIDS PRICE SHEET: RI-MCL-PL

## CARGILLE OPTICAL COUPLING LIQUIDS

Cat. No. 16xxx	See IMMERSION OIL DATA SHEET: IO-DS
Cat. No. 241xx	MELTMOUNT™ Mounting Media - available in 1 oz. (30 cc) jars and convenient QUICK-STICKS™  Refer to DATA SHEET: RI-MOM-MM

## CARGILLE REFRACTIVE INDEX SOLIDS

Cat. No. 34100	SET M-1: Solid Refractive Index Standards, ½ cc each of 60 optical glasses & minerals -100 +200 mesh, refractive indices 1.34 to 2.40: 0.01 increments; includes wood case.  (LONG TERM OUT OF STOCK) See REFERENCE SETS DATA SHEET
Cat. No. 34200	SET M-7: Precision Optical Glasses, with extensive technical data. (LONG TERM OUT OF STOCK) See DATA SHEET: RS-M7
Cat. No. 34224  NEW - Replacing M-25 Contact us for details!	SET M-24: NVLAP Recognized Means of Verification of Refractive Index Liquids. (Sub-set of M-7) See DATA SHEET: RI-NVLAP

## CARGILLE REFRACTIVE INDEX ACCESSORIES

Cat. No. 18501	Rack: Model RF-1 Holds 52, ¼ oz. Stds.	\$	133.00	/ea
	(3 racks hold one RF-1 set)			
	Booklet " PRACTICAL REFRACTOMETRY	_		,
Cat. No. 18505	BY MEANS OF THE MICROSCOPE"	\$	6.75	/ea
	by Dr. Roy M. Allen			

FOB & SHIPPING POINT: CEDAR GROVE, NJ 07009 - USA
MINIMUM ORDER - USA, CANADA, MEXICO: \$ 50.00 → INTERNATIONAL: \$ 70.00
SEE SALES POLICY FOR FULL TERMS / PRICES SUBJECT TO CHANGE WITHOUT NOTICE

#### CARGILLE LABORATORIES

55 Commerce Road • Cedar Grove NJ 07009-1289 • USA
Ph: (973) 239-6633 8:15 AM - 4:45PM M-Th 8:00 AM - 12:00 PM Fri. ET
FAX: (973) 239-6096 • WWW.CARGILLE.COM

RI-MCL-PL-198

Replaces: RI-MCL-PL-197A Effective: January 15, 2022



## **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

## **CARGILLE MASTER CALIBRATION LIQUIDS**

Cargille Master Calibration Liquids are very stable, non-toxic liquids with refractive index measured to an accuracy of + 0.00005 at various temperatures and wavelengths. The unusually high accuracy of these refractive index measurements will often require that the user knows his or her working temperature with an accuracy of + 0.02 °C or better; this is because liquids typically have a temperature coefficient of - 0.0004 refractive index units per 1 °C so they will be affected by approximately 0.000008 refractive index units for each 0.02 °C difference in temperature.

When the Master Calibration Liquid has refractive index measurements at two temperatures, 20 °C or less apart, the user can compute a temperature coefficient and calculate (interpolate) refractive index at any in between temperature with an accuracy of at least  $\pm$  0.00006 ( the relationship of refractive index to temperature is nearly linear ). Typical temperature coefficients (accurate to  $\pm$  10%) are available from Cargille Laboratories and can in practice be used to correct for up to a known temperature change of 0.20 °C from temperature of calibration. All measurements are NIST (NBS) traceable. All measurements available are listed here.

Cat. No.	Master Calibration Liquids	Nominal	Temperature
19252	Code S50	nD=1.402	@25°C
19253	Code S50	nD=1.404	@20°C
19255	Code 06	nD=1.457	@25°C
19257	Code 06	nD=1.459	@20°C
19259	Code 1160	nD=1.490	@20°C
19261	Code 1160	nD=1.514	@25°C
19264	Code 1057	nD=1.572	@25°C
19268	Code 63	nD=1.630	@25°C
19300	Code S1050	nD=1.436	@30°C
*19340	Code 1160	nD=1.516	@20°C (Multi-Temp)

<sup>\* ±0.0001</sup> 

1 x ¼ fl. oz.	12 x ¼ fl. oz.	1 x 1 fl. oz.	12 x 1 fl. oz.
\$98.00	\$88.50 ea.	\$ 251.00	\$ 228.00 ea.

Note: Prices of multiples (12x) must be for the same Cargille Master Calibration Liquid.

## **CARGILLE MASTER CALIBRATION LIQUIDS**

Cat. No.	Code	Nominal	Actual Reading	Lot#
19252	<b>S</b> 50	nD = 1.402	( 1.40235 at 25 °C at 589.3 nm )	072681
19253	S50	nD = 1.404	( 1.40427 at 20 °C at 589.3 nm )	082581
19255	06	nD = 1.457	( 1.45746 at 25 °C at 589.3 nm )	121681
19257	06	nD = 1.459	( 1.45932 at 20 °C at 589.3 nm )	120981
19259	1160	nD = 1.490	( 1.48989 at 20 °C at 589.3 nm )	072176
19261	1160	nD = 1.514	( 1.51432 at 25 °C at 589.3 nm )	100977
19264	1057	nD = 1.572	( 1.57230 at 25 °C at 589.3 nm )	030374
19268	63	nD = 1.630	( 1.63026 at 25 °C at 589.3 nm )	070395
19300	S1050	nD = 1.436	( 1.43604 at 30 °C at 589.3 nm )	022772
19340	1160	nD = 1.516	*( 1.5163 at 20 °C at 589.3 nm )	051582

\* ±0.0001

FOB & SHIPPING POINT: CEDAR GROVE, NJ 07009 – USA

MINIMUM ORDER – USA, CANADA, MEXICO: \$ 50.00 → INTERNATIONAL: \$ 70.00

SEE SALES POLICY FOR FULL TERMS / PRICES SUBJECT TO CHANGE WITHOUT NOTICE

## CARGILLE LABORATORIES

55 Commerce Road • Cedar Grove NJ 07009-1289 • USA
Ph: (973) 239-6633 8:15 AM - 4:45PM M-Th 8:00 AM - 12:00 PM Fri. ET
FAX: (973) 239-6096 • WWW.CARGILLE.COM



### **CARGILLE LABORATORIES**

55 Commerce Road • Cedar Grove • New Jersey • 07009 – 1289 USA
Ph: 973-239-6633 • Fax: 973-239-6096 • www.Cargille.com

Precaution Sheet RI-SS-PS-1186

## REFRACTIVE INDEX LIQUIDS STANDARD SERIES

## SAFETY AND HANDLING

SERIES AAA, AA, A, B, M-These series have low toxicity; however, good laboratory procedures should be observed. Series AAA and M are slightly volatile and should be kept well stoppered. Series B and M should be protected from light as they darken slowly from exposure to light.

SERIES H, EH FH\* GH\* Note\* FH and GH are not currently for sale.

- Cargille High Series and Extra High Series Refraction Index Liquids and FH and GH Series Melts contain arsenic tribromide which is <u>toxic</u> and <u>corrosive</u>.
- 2. Personnel handling these materials should avoid contact and breathing of vapors. Any material on the body should be immediately removed by thorough scrubbing. Persons with any allergenic history should be extremely careful to avoid contact.

NOTE: Arsenic can be absorbed through intact skin.

- 3. The greatest danger of arsenic poisoning is from ingestion. The possibility of accidental ingestion is greatly reduced by preventing eating and smoking in areas where these liquids are used.
- 4. Since these materials are corrosive, it is recommended that slides be prepared away from the microscope and mounted specimens left on the microscope no longer than necessary. Direct contact with instruments will attack metal parts and leaded optical glasses.
- 5. These materials also react with moisture in the air. Therefore, mountings should be made quickly so the liquid is protected from the atmosphere by the cover glass, and caps should be tightened on bottles to prevent escape of vapors and avoid moisture-vapor reactions.

Replaces: MOM-MM-DS-197A Effective Date: January 15, 2022



## **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

# CARGILLE MELTMOUNTS<sup>TM</sup> for MICROSCOPY Including MELTMOUNTS<sup>TM</sup> for Asbestos

The Cargille Meltmount™ series of mounting media are specially formulated optical-quality thermoplastics for use in microscope slide mounting and in other optical coupling applications.

#### Meltmounts™ are:

- 1. Instant they are thermal mountants and require "no oven time"
- 2. 100 % useable contain no solvents
- 3. Less Expensive per slide
- 4. Reversible thermally, for particle retrieval or re-orientation
- 5. Soluble in toluene if needed for special techniques or clean-up
- 6. Fluid at 65 °C a temperature chosen because it makes a permanent mount and protects the majority of specimens from thermal changes
- 7. PCB-FREE
- 8. Direct replacements for 'older style' media

	Old Media		<u>Meltmounts™</u> <u>Equivalent</u>
•	Canada Balsam	*	Meltmount™ 1.539
•	Aroclor 5442	•	Meltmount™ 1.662
•	Naphrax	•	Meltmount™ 1.704

### MELTMOUNT™ 1.539 Code 53

Meltmount™ 1.539 has a refractive index (nD @ 25 °C) of 1.539 and an Abbe V dispersion of 45 making it optically similar to Canada Balsam and, therefore, ideal for mounting many biological specimens but without the long drying time of Canada Balsam.

Patent Pending

\$ 77.25 /fl.oz

## MELTMOUNT™ FOR CHRYSOTILE ASBESTOS Code 25761

Cat.#24145 Patent Pending \$ 85.00 /fl.oz

Cat.#24140

Meltmount™ Code 25761 has dispersion characteristics making it appropriate for mounting chrysotile asbestos - CALL TO CHECK AVAILABILITY

## <u>MELTMOUNT™ 1.582 Code 5870</u> Cat.#24150 Patented \$ 77.25 /fl.oz

Meltmount<sup>™</sup> 1.582 has a refractive index (nD @ 25 °C) of 1.582 and an Abbe V dispersion of 33. Its optical clarity makes it the preferred choice for minimum visible absorption.

### MELTMOUNT™ 1.605 Code 5870 Cat.#24152 Patented \$ 77,25 /fl.oz

Meltmount™ 1.605 has a refractive index (nD @ 25 °C) of 1.605 and an Abbe V dispersion of 30, making it appropriate for mounting asbestiform Tremolite, Anthophyllite and Actinolite.

## MELTMOUNT™ 1.662 Code 5870 Cat.#24160 Patented \$ 77.25 /fl.oz

Meltmount™ 1.662 has a refractive index (nD @ 25 °C) of 1.662 and an Abbe V dispersion of 26, optically similar to Aroclor 5442, but is PCB-free.

Cat.#24165

Patented

\$ 77.25 /fl.oz

Meltmount™ 1.680 has a refractive index (n<sub>D</sub> @ 25 °C) of 1.680 and an Abbe V dispersion of 25, making it appropriate for mounting Amosite and Crocidolite asbestos.

MELTMOUNT™ 1.704 Code 5870

Cat.#24170

Patented

\$ 77.25 /fl.oz

Meltmount™ 1.704 has a refractive index (n<sub>D</sub> @ 25 °C) of 1.704, similar to naphrax, and an Abbe V dispersion of 24.

#### QUICK-STICK™

Cargille Meltmount™ is now available in a convenient stick form called Quick-Stick™. It can be used to make permanent microscope slide mounts quickly.

Quick-Stick™ can be applied to a slide on a hotplate. As soon as the specimen and cover glass are positioned and the slide is cooled, you have a permanent prepared slide that can be reversed by reheating, if you should wish to retrieve a particular particle.

DESCRIPTION	<u>nD</u>		CAT. NO.	2/3 o	<u>z.</u>
Quick-Stick™	1.539	Code 53	#24040	\$ 72.75	/ea
Quick-Stick™	1.582	Code 5870	#24050	\$ 72.75	/ea
Quick-Stick™	1.605	Code 5870	#24052	\$ 72.75	/ea
Quick-Stick™	1.662	Code 5870	#24060	\$ 72.75	/ea
Quick-Stick™	1.680	Code 5870	#24065	\$ 72.75	/ea
Quick-Stick™	1.704	Code 5870	#24070	\$ 72.75	/ea

## Meltmount™ / Quick Stick™ and the proper care of your slides

Meltmount™ is a THERMAL PLASTIC MATERIAL. This means its viscosity is dependent on temperature, (inversely dependent). As the temperature increases the viscosity decreases. There is no sharp melting point. Being thermal plastic, it is capable of "cold flow". This means the Meltmount™, the specimen, the slide, and the cover slip can all move independently of each other given a mix of time, temperature, and lateral pressure or gravity.

Storage of prepared slides: treat them as the valuable items they are. Store:

- A. Flat, cover slip on top
- B. In the dark
- C. Away from dust and fumes
- D. Meltmount™ is meant to be thermally reversible. Don't allow this to happen inadvertently by storing or transporting prepared slides above 88 °F, (31.1 °C).

For complete technical information on Meltmounts<sup>™</sup> contact the Cargille Technical Staff at 973-239-6633

TM Meltmount and Ouick-Stick are Trade Names of Cargille Laboratories

FOB & SHIPPING POINT: CEDAR GROVE, NJ 07009 – USA
MINIMUM ORDER – USA, CANADA, MEXICO: \$ 50.00 ← INTERNATIONAL: \$ 70.00
SEE SALES POLICY FOR FULL TERMS / PRICES SUBJECT TO CHANGE WITHOUT NOTICE

## CARGILLE LABORATORIES

55 Commerce Road ◆ Cedar Grove NJ 07009-1289 ◆ USA
Ph: (973) 239-6633 8:15 AM - 4:45PM M-Th 8:00 AM - 12:00 PM Fri. ET
FAX: (973) 239-6096 ◆ WWW.CARGILLE.COM



## **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

## **BRIX DATA**

Our customers working with % Brix have been divided into 3 groups.

Please Note: Many refractometers have a temperature compensation mode that works for water based materials, but is not suitable for oils including our Brix Calibration Standards. The compensation mode should be turned <u>off</u> during calibration and the actual sample temperature monitored and recorded.

The First Group works without a constant temperature circulating water bath to control Refractometer Temperature. Many times they are using a hand held refractometer. This group can purchase from our Standard Series price list and use a "Cargille Standard Series Brix Chart". The refractive index shown in the left column of this Brix chart has been calibrated at 25°C, but using temperature coefficients, we show what the refractometer should read in Brix when a Standard Series liquid is put on the refractometer; the (% sucrose at 20°C), value is shown in the far right column. Cat. #88105 "Cargille Temperature Compensation Chart" is available for each Cargille Refractive Index Standard Series Liquid ordered, at a cost of \$5.00 each. This chart is very helpful when calibrating your refractometer.

The Second Group works with a constant temperature circulating water bath to control

Refractometer Temperature and needs better precision than Group 1 for Brix values. For this group we recommend:

CATALOG #	LL CODE	<b>BRIX UNITS</b>	MIN. QTY	<b>COST</b>
20106 - RCF	3421	1 - 40 Brix	4 X 1 fl. oz.	\$ 548.00
20112 - RCF	S1056	41 - 68 Brix	4 X 1 fl. oz.	\$ 458.50
20127 - RCF	5610	69 - 85 Brix	4 X 1 fl. oz.	\$ 492.00

All custom Brix liquids are **blended** to a Refractive Index tolerance of  $\pm$  0.0002 and **read** to a R.I. tolerance of  $\pm$  0.0001 at 20°C. Brix tolerances vary **nominally** from  $\pm$  0.070 to  $\pm$  0.038 depending on the Brix number chosen;  $\pm$  0.070 at 0.0% Brix, tightening to  $\pm$  0.037 at 85.0% Brix. Please contact our Technical Department if you have any questions. All custom Brix liquids are provided with Letters of Certification and are bottled as 4 x 1 fl. oz.

The Third Group is for those requiring the greatest precision for Brix values. This group needs to order the highest precision for refractive index in order to get the best precision for Brix. We have 3 Master Calibration Liquids in stock that can be used for this purpose, *nominally* one at 42%, 67% and 80%. Refer to the enclosed Technical Bulletin RI-MCL-BRX-TB-XXX which describes these liquids. Please specify Brix labels when ordering.

Please contact the Technical Department with any questions

Replaces: RI-BXCW-PL-197A Effective Date: January 15, 2022



## **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

## 0.000% BRIX STANDARD

## REFRACTIVE INDEX CERTIFIED WATER \*

0.000% Brix at any temperature (15 - 35 °C)

NIST/ASME uses as the authority for the properties of water, the publication issued by IAPWS, (The International Association for the Properties of Water and Steam). The IAPWS has published the "absolute" refractive index of water, that is relative to a vacuum. We have calculated its refractive index, relative to air, by dividing the absolute refractive index of water by the absolute refractive index of air. (References available).

ACS Reagent Grade Water was measured for refractive index at 589.3 nm on an Abbe type refractometer standardized with NIST traceable standards.

Temperature Degrees Celsius ± 0.01	Absolute Refractive Index of Water ± 0.00005 at 589.3 nm, ASME Steam v2.2:	Refractive Index of Water relative to air at 589.3 nm, calculated values:	Refractive Index of Water (RGW) read by Cargille ± 0.00005 RI Units at 589.3 nm 23°C, relative to air, calculated values:	Brix Equivalent as per ICUMSA 2000:
20	1.33334	1.33297	1.33297	0.000
25	1.33285	1.33249	1.33249	0.000
30	1.33228	1.33193	1.33193	0.000

<sup>\*</sup>Note: Refractive Index of water at 589.3 nm ± 0.00005 is equivalent to ± 0.000% Brix ± 0.035

#### Catalog # 19400

1 x 1/4 fl. oz.	12 x 1/4 fl. oz	1 x 1 fl. oz.	12 x 1 fl. oz
\$98.00	\$ 88.50	\$ 251.00	\$ 228.00

### LETTER OF CERTIFICATION ACCOMPANIES EACH BOTTLE

Replaces: RI-MCL-BRIX-TB-197A Effective Date: January 15, 2022



## **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

# CARGILLE MASTER CALIBRATION LIQUIDS WITH EQUIVALENT % BRIX (SUCROSE) - ICUMSA 2000

Cargille Master Calibration Liquids are very stable, non-toxic liquids with refractive index measured to an accuracy of  $\pm$  0.00005 at various temperatures and wavelengths. The unusually high accuracy of these refractive index measurements will often require that the user knows his or her working temperature with an accuracy of  $\pm$  0.02°C or better; this is because liquids typically have a temperature coefficient of -0.0004 refractive index units per 1°C so they will be affected by approximately 0.000008 refractive index units for each 0.02°C difference in temperature


When the Master Calibration Liquid has a refractive index measurement at two temperatures,  $20^{\circ}\text{C}$  or less apart, the user can compute a temperature coefficient and calculate (interpolate) refractive index at any temperature in between with an accuracy of at least  $\pm$  0.00006 (the relationship of refractive index to temperature is linear). Typical temperature coefficients (accurate to  $\pm$  10%) are available from Cargille Laboratories and can in practice be used to correct for up to a known temperature change of 0.20°C from the temperature of calibration. All measurements are NIST (NBS) traceable. All measurements available are listed here. n = refractive index

Cat. No. 19251-BXS	Code 3421	Nominal nD = 1.362
( n = 1.36176 at 20 °	C at 589.3 nm )	( 18.742 % BRIX ±0.030 at 20 °C )
Cat. No. 19253-BXS	Code S50	Nominal nD = 1.404
( n = 1.40427 at 20 °	'C at 589.3 nm )	( 42.247 % BRIX ±0.025 at 20 °C )
Cat. No. 19257-BXS	Code 06	Nominal nD = 1.459
( n = 1.45932 at 20 °	°C at 589.3 nm)	( 67.461 % BRIX ±0.021 at 20 °C )
Cat. No. 19259-BXS	Code 1160	Nominal nD = 1.490
( n = 1.48989 at 20 °	C at 589.3 nm)	( 79.687 % BRIX ±0.019 at 20 °C )

Price per Bottle

1 x 1/4 fl. oz.	12 x 1/4 fl. oz	1 x 1 fl. oz.	12 x 1 fl. oz
\$ 98.00	\$88.50 ea.	\$ 251.00	\$ 228.00 ea.

NOTE: Prices of multiples (12x) must be for the same Cargille Master Calibration Liquid

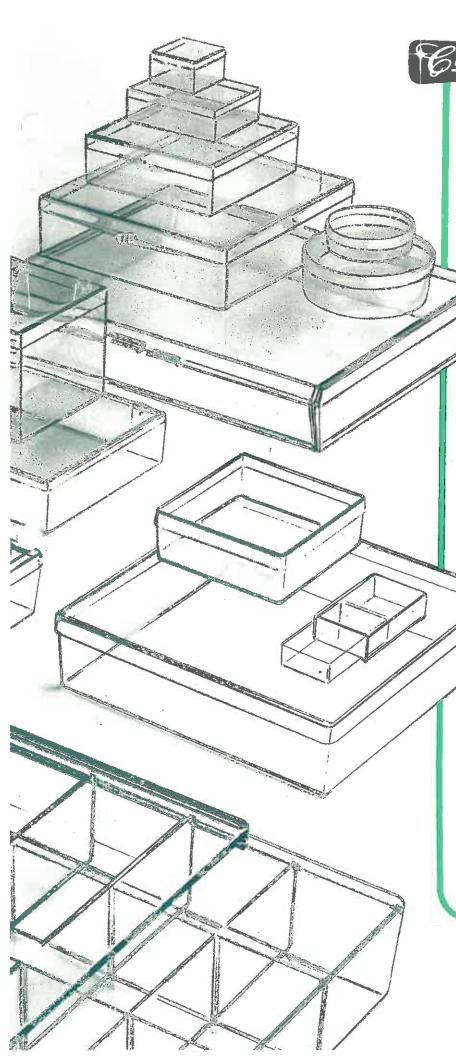

PLASTIC BOXES

...SeeWhat's in Store!

Cargille Plastic Boxes are in demand!
Whatever your storage needs, there's a Cargille Plastic Storage box that's perfect for you. Molded from polystyrene for optimum clarity and rigidity, they come in an unbelievable variety of shapes, styles and sizes.


- Square Boxes
- Rectangular Boxes
- Round Boxes
- Partitioned Boxes
- Friction-fitting Lids
  - Hinged lids with Snap locks
  - Shallow Boxes
- Deep Boxes
- Small Boxes
- Big Boxes


## **Economical**

Low cost allows you to organize your storage system today! Open stock permits prompt delivery and system expansion at any time. Inquiries on special orders invited.

F.O.B. 55 Commerce Road, Cedar Grove, NJ 07009 Tel: (973) 239-6633 Fax: (973) 239-6096

See Sales Policy for Full Terms
Prices Subject to Change Without Notice

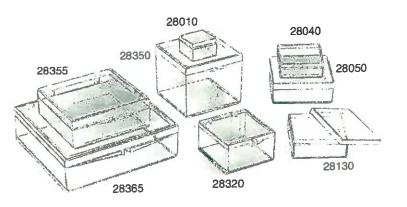

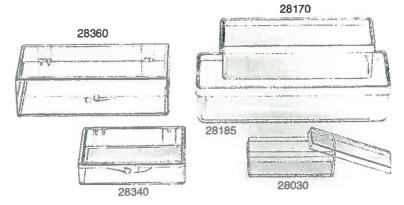

## **Square Boxes**

Cargille Square Plastic Boxes have two equal dimensions for length and width. The "Squares" are available in a variety of sizes in both friction-fitting lids and hinged-lids with snap locks.

## Rectangular Boxes

Finally—the right shape for all those long and narrow items. Friction-fitting lids or hinged-lids with snap locks available on a wide selection of box depths and sizes.

## Round Boxes

Super for storing many items that just don't seem to fit in standard square or rectangular boxes. Supplied with friction-fitting lids.

## Plastic Match-Boxes


Especially for those little pieces that were constantly being misplaced. Easy-to-use, contents always visible.

## **Partitioned Boxes**


Complete organization for storing singular or groups of items in individual compartments. Stored items stay separated and are readily visible from the exterior. Extra-heavy-gauge wall construction permits containment of heavy objects—protects delicate items.


## Tray Box and Tray Sets

The compact, solid fiberboard Tray Box makes instituting a plastic box/sample storage system easy and efficient. To form a Tray Set, use plastic boxes for specimen storage, then organize boxes within the fiberboard Tray Box. Eliminates misplacement or inadvertent sample loss, allows rapid retrieval of specimens. Tray Boxes are available with or without accompanying plastic boxes.

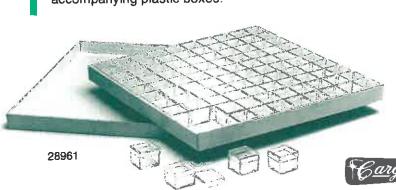



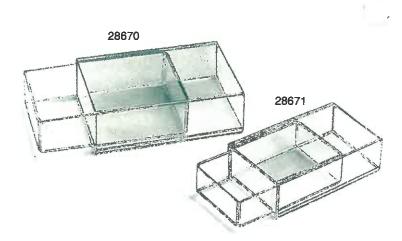

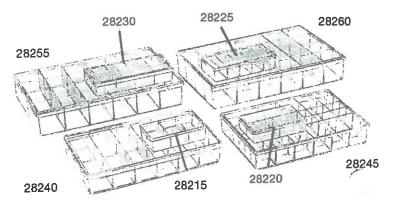

R. P. CARGILLE LABORATORIES, INC.

Effective: January 15, 2022

Cargille
Services to the Science Since 1924

## **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

## **PLASTIC BOXES PRICE LIST**

CATALOG INSIDE DIMENSIONS (INCHES)																
NO.	<u>LENGTH</u>	<u>WIDTH</u>	HEIGHT	LID_H	BASE H				PRICE PER BOX 1 50 100				E	500		
SQUARE:		FR	ICTION .	- FITTING						Τ.	2	<del>30</del>	÷	00	2	<u>00</u>
28010	25/32	25/32	5/8	***************************************					\$	1.50	\$	1.40	\$	1.35		1.20
28040	1-11/16	1-11/16	9/16		**********				\$	1.75	\$	1.70	\$	1.60		1.40
28050	2-1/2	2-1/2	7/8			<del>2111111111111111111111111111111111111</del>			\$	2.15	\$	2.10	\$	1.95	\$	1.75
28130	2	2	3/4			2///	*********		\$	2.05	\$	1.95	\$	1.85	\$	1.65
HINGED - SNAP-LOCK																
28310	1	1	5/8	1/8	1/2				\$	1.30	\$	1.25	\$	1.20	\$	1.00
28320	2	2	1-1/8	1/8	1				\$	1.90	\$	1.85	\$	1.70		1.60
28350	2-9/16	2-9/16	2-3/16	1/4	1-15/16				\$	3.20		2.95	\$	2.85		2.70
28355	3-1/16	3-1/16	1	1/4	3/4	DATE OF THE PARTY	-		\$	3.05	\$	2.80	\$	2.70		2.35
28365	3-1/10 4-9/16	4-9/16	1-1/4	1/4	1				\$	5.00	-	4.80	\$	4.65		4.25
20303	4-9/10	4-9/10	1-1/	1/4	•				*	0.00	*		•		•	
RECTANGUL	AR:	FRICT	ION_FITT	TING LIDS												
28020	1-11/16	3/4	5/8				********		\$	1.60	\$	1.55	\$	1.50	\$	1.35
28030	2-5/16	3/4	3/4	****					\$	1.65	\$	1.60	\$	1.45	\$	1.35
28060	3-3/16	2-9/16	1-1/4						\$	2.20	\$	2.15	\$	2.05	\$	1.85
28155	3-3/16	6-13/16	1-5/8		***************************************	S <del>timmoo</del> t		-	\$	7.35	\$	6.85	\$	6.25	\$	5.65
28170	4-1/4	1-1/2	1				*********		\$	3.20	\$	3.05	\$	3.00	\$	2.60
28180	5	5-1/4	1-5/16						\$	7.05	\$	6.55	\$	6.35	\$	5.40
28185	5-1/2	2	1						\$	3.30	\$	3.05	\$	2.85	\$	2.50
		HING	ED - SN	IAP-LOCK												
00005	0.4/0			1/8	1/2				\$	1.60	\$	1.40	\$	1.25	\$	1.20
28325	2-1/8	1-5/8	5/8 9/16		1/2				\$	1.75	\$			1.60	•	1.45
28340	2-7/8	2		1/16 1/2	1/2				\$	2.70		2.30	-	2.15		1.95
28352	3-1/2	2-9/16	1 1-1/8	9/16	9/16				-	2.60		2.55	•	2.40		2.15
28360	4-3/8 6	2-1/16 4	1-1/4	1/4	1							4.25		4.00		3.60
28385	•	-	1-1/4	1/4	•				•			9.30				
28388	7-3/8	4-29/32	1-1/2	1/4	1-1/4				Ψ	10.10	Ψ	0.00	Ψ	0.00	•	0.20
28390	8-1/8	6-1/4	1-3/16	1/4	15/16				\$	16.45	\$	14.05	\$	13.15	\$	12.70
20000	0	•							-							
ROUND:		(DIA.)														
									_	4 75	*	4	٠	4.40	•	4.00
28810		1-3/8	3/8													
28820		1-5/8	1/2	***************************************	********							1.55				
28840	0	2-1/2	7/8			L-over 1002			\$	1.70	2	1.55	\$	1.40	\$	1.30

REC	TANGUL	AR:			PAR	TITIONE	D - SNAP	- LOCK			•		
	Cat. No.	Outsi <u>de D</u>	imensions	(Inches)	Compartr	nent Size	e <u>- (l</u>	nches )		Price Per	Box	;	
		L	W	Н	No.	L	W	Н		1	50	100	500
	28210	4-5/8	3	1-1/8	8	1-1/16	1-1/4	1	L#11-0000	\$ 7.70	\$ 7.50	\$ 7.05	\$ 6.15
	28215	4-5/8	3	1-1/8	6	1-5/16	1-3/8	1	***********	\$ 7.90	\$ 7.50	\$ 7.05	\$ 6.15
	28220	4-5/8	3	1-1/8	4	1-5/16	2-1/8	1		\$ 7.90	\$ 7.50	\$ 7.05	\$ 6.15
	28225	5-7/8	3-1/2	1-5/16	5	1-1/16	3	1-1/8		\$ 9.80	\$ 8.75	\$ 8.35	\$ 7.40
	28230	7	3-3/4	1-1/4	12	1-11/16	1-1/16	1-1/8		\$ 11.15	\$ 10.45	\$ 10.00	\$ 8.70
	28235	8 1/4	4-1/2	1-3/8	18	1-1/4	1-1/4	1-3/16		\$ 14.60	\$ 13.45	\$ 12.85	\$ 10.95
	28240	11	6-3/4	1-3/4	18	1-5/8	1-15/16	1-9/16		\$ 27.05	\$ 25.05	\$ 23.80	\$ 21.00
	28245	10	7	1-13/16	36	1-1/2	1-1/16	1-9/16		\$ 30.85	\$ 27.85	\$ 26.30	\$ 23.30
	28255	13-1/8	9	2-5/16	12	2	4-3/16	2-1/16		\$ 43.40	\$ 38.80	\$ 36.30	\$ 32.75
	28260	13-1/8	9	2-5/16	24	2	2	2-1/16		\$ 43.40	\$38.80	\$ 36.30	\$ 33.10
	SLIDE -	COVE	₹										
	28250	10-3/4	- 8-7/8	1-13/16	24	1-11/16	2	1-9/16		\$ 39.70	\$ 35.65	\$ 33.20	\$ 29.85
	DI ACTI	C MATCH	BOYES										
				(Inch	es)					Price	Per Box	;	
	<u> </u>	<u>L</u>	W	<u>H</u>						<u>1</u>	<u>50</u>	100	<u>500</u>
	28670	2	1-1/4	1/2						\$ 3.00	\$ 2.75	\$ \$2.60	\$2.30
	TRAY B	OX											
	Cat. No.	Inside Di	imensions	(Inc	hes)					Price I	Per Box		ots Of:
	28960 TRAY S	<u>L</u> 9-1/2	<u>W</u> 9-1/2	<u>H</u> 3/4						<u>1</u> \$ 14.2	<u>5</u> 20	<u>10</u> 30 \$ 13.5	
	CATALO			PLASTIC S NO.	BOXES PER SET	ARRA	NGEM <u>EN</u> T	г	PRICE P	ER TRAY	SETS 10	LOTS	<u> </u>
	28961		28	3010	100	10	X 10		\$ 115.10	\$ 100.1	0 \$ 95.2	25 \$ 90	.10
	28962		28	3020	50	5	X 10		\$ 70.50	\$ 66.1	0 \$62.8	80 \$ 58	.70
	28963		28	3030	30	3	X 10		\$ 44.70	\$ 45.0	5 \$ 42.	15 \$ 40	.85
	28964		28	3040	25	5	X 5		\$ 47.00	\$ 43.4	0 \$41.	75 \$38	.80
	28965			3130	16		X 4		\$ 39.95	\$ 37.2			.45
	28966			3310	56	8	X 7		\$ 60.35	\$ 57.2	0 \$55.9	90 \$51	.35
	28967		28	3325	20		X 5		\$ 34.95	\$ 33.0	5 \$ 32.0	65 \$29	.65
	28968		28	3340	12	3	X 4		\$ 30.75	\$ 28.8	0 \$28.	2 <b>5 \$ 2</b> 5	.70
	28969		28	3670	24	4	X 6		\$ 60.05	\$ 57.3	5 \$ 56.	15 \$51	.45

FOB & SHIPPING POINT: CEDAR GROVE, NJ 07009 – USA
MINIMUM ORDER – USA, CANADA, MEXICO: \$ 50.00 ← INTERNATIONAL: \$ 70.00
SEE SALES POLICY FOR FULL TERMS / PRICES SUBJECT TO CHANGE WITHOUT NOTICE



# CARGILLE-ALLEN MICROSCOPY REFERENCE SETS

# REFRACTIVE INDEX STANDARDS COMMINUTED MINERALS • MICROSCOPY SLIDES

FOR
RESEARCH
EDUCATION
QUALITY CONTROL
INDUSTRY





The identification of sample materials for research or quality control is frequently performed by referral to standards. The credibility of a determination is reflected by the accuracy of the reference standards used. Many individuals arbitrarily "acquirs" various sample materials destined to be used as reference standards. Although this technique may temporarily serve its purpose, problems may develop particularly if an entire program is based on reference materials which were initially and unknowingly unreliable. Furthermore, accidental loss or damage to an irreplaceable reference material can virtually destroy a long-term research project or definementally disrupt a quality control program. It is for these and many other reasons that Cargille-Allen Reference Sets have been so widely relied upon and accidenced by scientific, Industrial and educational institutions throughout the world.

Cargille-Allen Reference Sets constitute a unique assemblage of comminuted optical glasses and minerals confained in glass vials, and comminuted minerals and various materials mounted on slides "ready-to-use" for microscopic examinations. All materials used are carefully selected and obtained as pure as possible and further concentrated in the case of minerals.

Material organization was initially based on serving existing scientific needs as proposed by Dr. Roy M. Allen, an industrial consultant, research microscopist and author in the field of microscopy and photomicrography. As scientific interests expanded and technology advanced, a need for more comprehensive reference materials correspondingly increased. And today, Cargille-Allen Reference Sets have a broad range of applications encompassing many fields.



### Comminuted Reference Standards

#### REFRACTIVE INDEX STANDARDS, SET M-1

A unique collection of selective, comminuted optical glasses supplemented by purified minerals provide areasonable range of refractive indices from 1.34 to 2.40 in increments of 0.01. This set supplements Carglile Refractive Index Liquids (see Data Sheet RI) by explaining the types of standards available for microscopic identification by refractive Index determinations.

The specimens were selected for their placement on the refractive index scale and for their accuracy and purity. As many optical glasses as possible were used, and new specimens are constantly being explored for possible inclusion as they contribute to the accuracy or completeness of the collection.

Approximately 1/2 cc of 60 different materials comminuted to -100 mesh are assembled as a set in a handsome mahogany: wood case with tiered shelves for accessibility. Each specimen is contained in a labeled glass screw-thread vial with a plastic screw-cap closure.



REFRACTIVE INDEX STANDARDS, SET M-1, CAT. NO. 34100 1/2 cc each of 60 optical glasses and minerals; refractive index range: 1.34.10 2.40; 0.01 increments; includes tiered mehogany wood case.

### COMMINUTED MINERALS, SET M-4

Microscopical examination of pure minerals in comminuted form provides insight to many individual characteristics of materials difficult to determine as solida. Some of the many properties which may be ascertained from comminuted materials are: exact determination of refractive indices by the immersion method, separation studies into isotropic and anisotropic groups, extent of birefringenes, conoscopic observation of interference figures in particles ortented at random, crystallographic and cleavage studies, pleochroism (when present) in all shades of color, extinction angle with reference to cleavage traces; color observations of finely divided material, microscopic inclusions. Also, comminuted materials have broad applications in spectroscopy; specific gravity determinations and in many microchemical procedures.

Complete Comminuted Minerals, Set M-4, consists of approximately 1/2 cc of the following 60 materials comminuted to -100 mesh in labeled screw-thread glass vials with plastic screw-cap closures and an attractive mahogarry wood case.

1. Quertz	17. Carnet	30. Slotki	45. Tale
2. Caloks	(Almendita)	31. Theumselte	46. Duncila
3. Orthopiase	18. Siderite	32. Pretnite	47. Azurbe
4. Microsline	13. Beryl	33. Peotolite	48. Malesitie
S. Albita	28. Corundan	34. Bartin	49. Sphaledte
6. Labradortto	21. Cerundom.	35. Ambydrite	50. Schoolte
7. Horsblande	ver. Emery	38. Gypoun	51, Canadicit
4. Tramolity	22. Arapontie	37. Gryellto	52. Walleston
S. Augite	23. Morantie	34. Kyantto	83. Zinglia
10. Apotito	24. Towar	31. Spodumene	E4. Serpestin
11. Tourmelige	25. Ruille	46, Ambiygonite	EK. Stantile
12, Třianko	26. Pjanrite	41. Kimidolo	#E. Deleatte
13. Olieine	27. Zingen	42. Rhodeshrosita	57. Gimiteelte
14. Hyphelitz	26. Ventrimite	43. Ashsatos	St. Conf
15. Zedalite	29. Říhodosíte v.,	Where (long)	SO. Dissidian
16. Lepidolite	(Fowlerite)	44. Knolin	60. Pumica
·	*		

COMMINUTED MINERALS, SET M-4, CAT, NO. 24400 1/2 oc each of 60 minerals; -100 mesh; includes mahogeny wood case.

### Mineralogical Slides

(All Slides are prepared using Cargille, Meltmount\* 1.662 - Cat # 24160.)

The preparation of slides for microscopy is often laborate, time consuming and detracting from ensuing investigations. Also, it is frequently difficult to secure the materials of interest in the necessary purity to generate meaningful results. The following assemblage of both common and unusual com-minuted materials mounted on 3" x 1" alides avoid sample preparations by the microscopist and permit projects to immediately start.

The Mineralogical Stides, MS-Series, consist of 6 sets of comminuted materials (-100 mesh) mounted in Meltmount<sup>a</sup>. Each set is comprised of 25 stides in a protective plastic microscope stide box. The minerals vary from each other in at least one or several ways. Collectively, they reveal practically all mineralogical characteristics. Examinations in both plain and polarized (crossed prisms) light disclose different features.

In plain polarized light, the following features may be determined: color, degree of opacity or transparency, pleochroising inclusions within grains; grain configuration, evidence of cleavage direction and angles; relative refractive index as compared to Metrinount\*\* since minerals with an index near 1.882, are atmost invisible and very high and very low index minerals prominently stand out.

under polarized light (crossed prisms), other features may be revealed; the shifty of a mineral to polarize; extent of birefringence since low birefringence produces faint polarization with no colors; very high birefringence (e.g., calcile) show brilliant white with no colors, and moderate birefringence show brilliant white with no colors, and moderate birefringence show brilliant white with no colors, and moderate birefringence show brilliant white with no colors of mineral goaln; edinction angles, with respect to any cleavage traces evident; the presence or detection of impurities in either plain or polarized light since the majority of comminuted minerals include trace quantities of some associated mineral which occurs within or attached to it that can not be eliminated without altering the natural characteristics of the mineral; examining interference figure of the material by conoscopic observation with biaxial mineral grains.

SET M-2a. ELEMENTARY MATERIALS— This set is subdivided in four categories consisting of: Naturally Attritioned Materials to diaplay the effects of weathering on grains and geological depositions of micro tossis; Abrasive and Potishing Materials for microscopically comparing various ingredients used in omnulating polishing and cleaning compounds; Commercially Ground Materials which are used in carantics, fillers, lubricants, powders, etc.; and Test Materials for eligning polarizing prism directions and refractive index comparisons. MATERIAL LISTINGS:

1. Water-wom sand
2. Wind-yrorn sand
3. Zicron sand
4. Foreminiferous eand
5. Cellific sand
B. Dixiomeseess earth
7. Andickelen earth
6. Clamel, ground

1. Epoer	y, ground '
IQ. Carrie	oratediani, 220 steek
11, Carb	onandum, 600 flour
IZ. Pumi	tic provider
	Fpowder
H. Quari	z, grousid
S. Felde	ner, etoured

```
18. Vermiculle clay
13. Asbuston, forg fiber
28. Asbuston, short fiber
21. Graphile, powdered
22. Precipitated Calolium
Carbonale
23. Blottin
24. Canno glass
24. Grown glass
25. Filmi glass
```

15. Kaolin, ground 17. Tale, powdered Set M-2b, COMMON ROCK MINERALS—Comminuted to 100 mesh with refractive indicate indicated by Becke line as low, medium (near 1.662), high-MATERIAL LISTING:

1. Quertz	8. Biotile	16. Sodelile	21. Rullio
2. Calcille	9. Tremolite	16. Beryl	21. Serpentin
3. Microcline	10. Apolite	17. Corundum	23. Fleerike
4. Albite	11. Tõurmalise	18. Ziroon	24. Opal
5. Labradorite	12. Titaelle	18. Garnel	25. Obsidian
E, Hornblende	13. Olivina	(Almandite)	
7-Augile	14. Mapholita	20. Topez	

SET M-2c, MINERALS OF COMMERCIAL IMPORTANCE - 25 minerals of special interest because of their commercial importance. MATERIAL LISTING:

OH	INCE:				
1.	Sarite-	6. Cryolite	11, Makschite	16. Casalterite	21. Rhodonite
2.	Anhydrka		12. Periolese	17. Willemite	22. Sictie
	Gyptum		13, Menzelle	11. Zincke	23. Yhnempalte
- 4.	Spodennes	9. Amblygonite	14. Sphalarita		24. Probable
- Ş.	Kyanite	18. Asprille	15. Schoolte	20. Lapidolita	2£. Pectolite

SET M-2d, SUPPLEMENTARY MINERALS — This set represents an expansion of the Comminuted Minerals Set. M-4, MATERIAL LISTING:

	- Continuing and			,,,,
Chalcudony     Cristobaffie     Orthodese	7. Laudle 6. Aragonite 5. Chrysocolis	12. Game  (Spectarite) 13. Gamet	16. Tele 17. Emery 18. Glaucenite	22. Husbactle 23. Ludwigte 24. Collegiuse
4. Hornblonds	10. Rhodachrosite	(Andradite)	18. Beautile	25. Naphille Jede
	11. Gamet	14. Siderite	20. Pumbe	
6. Epidole	(Grossutarita)	15. Pyrophytitie	21. Wavelite	

SET M-2e, METALLIC MINERALS- 25, minerals that have a metallic appearance and are quite opeque even on their edges. Distinct colored treaks different from the color of the mineral may also be used as a proserty for amuning MATERIAL LISTING-

. and a Street	. 4 50			
1. Magnettle	6. Milliortte	11. Chalcocile	16. Pellurnelene	21. Columbite
2. Hemelite	7. Nicosita	12. Stannille	17. Ginuconite	22. Toolaille
3. Pyrlin.	ii. Cobalille	13. Galens	18. Wölfrum(te	21. Silbalte
4. Areanopyrite	8. Chalcopyrite	14. Frenklisite	19. Ferberite	24. Leadwigite
5. Pyrmolite	10. Bornite	18. Chromite	26. ((manite	25. Urariinite

ET M-21, LIGHT TRANSMITTING MINERALS -This set consists of 25 ninerals with the ability to transmit light on their thin edges and supple-ገፀ

ents the Me	tallic Minerals.	MATERIAL		
1. Willemite .	6. Cuprile	11. Magnasile	is. Thanse	20. Hughwerks
2. Zindfe	7. Coruspite	12. Rhodonile v	. 16. flatte	21. Regionr
2. Sphilerite	8. Wulfeslie	Fowlerite	17. Zircon	22. Monacita
4. Mulachile		13. Barite	18. Culociito	23. Ambiyoonile
S. Azurille	10. Becyl	14. Cleanabur	19. Schoolile	23. Ambiygonile 24. Vanedinile
	-			25. Polisoite

### Microscopy Slides of Furs, Fibers and Foods

The FFF Series are comprised of five sets of selective and authentic Fur, Fiber and Food specimens "ready-to-use" for microscopical examination and study. Each specimen is mounted on a 3" x 1" slide; each set consists of 25 slides packaged in a protective plastic microscope slide. box. This collection has broad applications as reference or comparison standards and is of particular value to industrial, commercial and quality control laboratories; criminologists and educators.

#### COMMERCIAL FUR HAIRS SLIDE SET. F-5

The specimens contained in this set are from all classes of animal patts directed for the commercial fur markets. This set in conjunction with Set H-6 display a comprehensive range of different hair structures.

#### COMMON HAIRS SLIDE SET, H-6

This set supplements Set F-5 by including additional fur hairs, human hairs and specimens from domesticated and farm animals and other representative apecimens.

1. Hustan, dark 2. Hustan, grey 3. Horse 4. Cow 5. Astropa	7. Dog B. Tirdbar Wolf B. House Call 10. Rat 11. Mouse pig	S. Disposed Hope S. Dis	12. Japaneses Pény), belly hatri gé. Listens 22. Refere 22. Refere 22. Maries
ORTHEROIAL	Eleche el Inic est	r ce.d	25. Costumers

Represented in this set are commercial fibers most of which are vege-

table or minera	al origin with some r	nanufactured fibers.	
1. Cotton	7. Blad		18, Short ther espectes
2. Flax	a. Wild Olli:	14. Kapok	20: Qiáca worl
3. Ramie	T. Spun Silic	16. Coulontal Risers	21, Lines tag pulp 22, Chemical wood pulp
4. Hentp	10. Moreorized Cotton	16, Milicrosd fibers	22. Changed wood pulp
S. Jule	11. Wool	17. Typha foettill fiberal	23, Mochanical wood pulp
d. Manila Home	12. Pinesppie Fibers	TE. Crockdollts,	24. Street liber pulp
		(hips astronton)	25. Separto Miero
	_		

#### SYNTHETIC AND MANUFACTURED FIBERS SLIDE SET, T-8

This collection is representative of virtually all classes of manufac-tured and synthetic fibers. From slide labelling, distinction between bright, semi-dull and dull finishes as well as denier size comparisons may 49 Pales Intendin Short

7. Cuprentionhum Rayon, Type A 20. Kaviar©, (Aramid) 10. Rylon, (polyamide Shor), hright 11. Rylon, (polyamide Shor), edit-duft 12. Syron, (polyamide Shor), edit-duft 12. Syron, (polyamide Shor), desti-duft 12. Syron, (polyamide Shor), edit-duft 13. Fiber gless	S. Acetaly, duly 20 det. S. Lycra Dispendex	44. Darron, (polyester Weer) 15. Erron, (polyester Weer) 15. Erron, (polyester Weer) 16. Escotte Otop, (polyestylane Mer) 17. Graphite yard, (Nedmol Di.C.C.) 18. Nomux (b. (Aramid) 19. Acting, semi-dul (poryta fiber)
	7. Guprantienkom Rayon, Type A 1. Cupramiponkom Rayon, Type B 9. Symen©, (polypropylene fiber) 10. Byton, (polypropylene fiber) 11. Bylon, (polypropylene fiber)	20. Kaviar©, (Aremid) 21. Tellon©, (TPE-(inorocarion filer) 22. Perion, dull - 23. Egg aliumin, ipretein filer) 24. Feather Karate filer

#### STARCHES AND FOOD CONDIMENTS SLIDE SET, F-9

For miscroscopical comparison studies, common starches and food

condiments in general u	ise are represented by th	iłs set.
1. Whest Planch 2. Constanch 3. Festes Blanch 4. Harley Starch 6. Rice Starch 7. Topleca Starch 8. Arrowroot Starch	t. Sage Starch t. Liona Beam Starch tl. Basiena Starch tz. Seybean bleaf tz. Seybean bleaf tz. Table Self t4. Black Pepper t5. Papilo 16. Clouismen, grosied	17. Mulmeg, grossed 18. Cloves, grotend 19. Allegice, ground 29. Qinger, ground 21. Mulmiant, ground 22. Cayeams Pepper 24. Certee; Mas ground 25. Cooca 25. Cooca

#### MICROSCOPE SLIDE SETS

25 stides per set; includes plastic protective microscope stide box.

### MINERALOGICAL SLIDES, MS-SERIES

MINERALOGICAL Schoes, mo-senies
Set M-2a, Cat. No. 34411, Elementary Materials
Set M-2b, Cat. No. 34421, Common Rock Minerals
Set M-2c; Cat. No. 34431, Commercially Important Minerals
Set M-2d, Cat. No. 34441, Supplementary Minerals
Set M-2a, Cat. No. 34451, Metallic Minerals
Set M-2f, Cat. No. 34461, Light Transmitting Minerals

Set M-2, Cat. No. 34401, Includes all six sets above

#### FURS, FIBERS, FOODS SLIDES, FFF-SERIES

Set F-5, Cat. No. 34511, Commercial Fur Hairs
Set H-6, Cat. No. 34521, Common Animal Hairs
Set CF-7, Cat. No. 34531, Commercial Fibers
Set T-8, Cat. No. 34541, Synthetic and Manufactured Fibers

Set F-9, Cat. No. 34551, Starches and Condiments Set FFF, Cat. No. 34501, includes all five sets above

Cargille Laboratories, Inc. reserves the right to make material substitutions in accordance with material availability; replaced items will be properly Replaces: RI-PL-197A

Effective Date: January 15, 2022



### **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

#### MICROSCOPY REFERENCE SETS


#### CARGILLE LABORATORIES PRICE LIST

		SOLID RE	FRACTIVE	INDEX STAN	IDARDS	<u>Price</u>		
Cat. No.	Set	Description				Per Set		
34100	M-1	REFRACTIVE INDEX STAND indices 1.34 to 2.40, 0.01 increm wood case.		LONG TERM OUT OF STOCK				
34400	M-4	COMMINUTED MINERALS:	COMMINUTED MINERALS: 1/2 cc each of 60 minerals; -100 mesh					
34200	<b>M</b> -7	PRECISION SOLID REFRACTIVE INDEX STANDARDS: 1/2 cc each of 58 Precision Optical Glasses, R.I. 1.34 to 2.40, 0.01 increments; RI values 0.00005 @ 7 Wavelengths. Se is accompanied by extensive technical data.						
34218	M-18	PRECISION SOLID REFRACTIVE INDEX STANDARDS: 1/2 cc each of 18 Precision Optical Glasses, R.I. 1.54 to 1.71, int. 0.01, with optical data for each glass. Precise Optical Value Sheet included.						
<i>NEW - 1</i> 34224	Replacing M M-24	PRECISION SOLID REFRACTO Optical Glasses, R.I. 1.49 to 1.7 Optical Data for each glass and included.	<u>2,</u> int. 0.01, v	vith optical data	for each glass. Precision	\$ 476.00		
			CALSUDE		- 25 Slides Each			
<b>344</b> 11	M-2a	Elementary Materials	\$ 250.75	34441 M-2d		\$ 250.75		
34421	M-2b	Common Rock Minerals	\$ 250.75	34451 M-2e	**	\$ 250.75		
34431	M-2c	Commercially Important Minerals	\$ 250.75	34461 M-2f 34401 M-2		\$ 250.75 \$1,338.75		
		FURS, FIBERS, FO	OOD SLIDES:	FFF SERIES – 25	Slides Each			
34511	F-5	Commercial Fur Hairs	\$ 236.50	34541 T-8	Synthetic & Manufactured Fibers	\$ 236.50		
34 <b>5</b> 21	H-6	Common Animal Hairs	\$ 236.50	34551 F-9	Starches & Condiments	\$ 236.50		
34531	CF-7	Commercial Fibers	\$ 236.50	34501 FFF	ALL FIVE SETS ABOVE	\$ 1,044.25		
		REPLAC	CEMENTS FO	R REFERENCE	SETS			
34208	* M-7, 18, 25	Replacement Vials, filled	\$ 29.25 /ea	. 34603 FFF	Replacement Slides	\$ 15.75 /6		
34601	M-1	Replacement Vials, filled	\$ 14.00 /ea		Replacement Slides	\$ 16.50 /6		
34602	M-4	Replacement Vials, filled	\$ 17.50 /ea		cope Slide Box, Holds 25 slides	\$ 18.50 /6		
34605	ALL SETS	Replacement Vials & Caps, empty	\$ 90.75 /g	•				
* Call for	availability							

# CARGILLE LABORATORIES

# HI-DENSITY STORAGE SYSTEMS



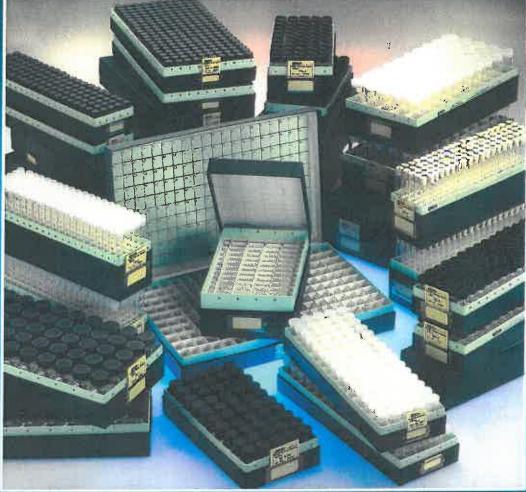

Cataloging Storage Sample Retrieval

MicroSlide Files • Tissue Files • Complete Sample Storage Sets

Including:

The New Tissue Files-200 • Storage for Existing Vial Systems


Storage Boxes for Vacutainer brand tubes

(Vacutainer is a Registered Trademark of Becton Dickinson)



### CARGILLE MICROSLIDE FILES - for prepared Microscope Slides

### **Cataloging And Storage System**

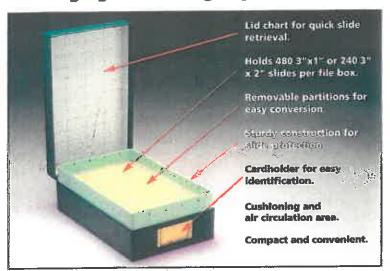

Cargille MicroSlide Files combine all of the features for prepared microscope slide storage, protection, simplified cataloging, reduction of filing errors and easy retrieval. Each compartment is numerically indexed to a permanent chart on the lid. A replaceable card and brass holder on the front provide instant identification of the contents. Cargille MicroSlide Files are "space efficient" providing maximum slide storage in the least amount of space and at a minimum cost.

Order Cargille MicroSlide Files: Catalog No. 73010

#### **SPECIFICATIONS**

#### Microscope Slide Capacity:

480 slides 25 x 76 mm (1 x 3") OR 240 slides 76 x 51 mm (3 x 2") per MicroSlide File.

#### Compartments:

48 2.9 x 16 x 7.6 cm (1 1/8 x5/8 x 3")

#### **Compartment Arrangement:**

4 across x 12 deep Partitions are removable to enlarge cells.

#### **Dimensions:**

Outside: 24.1 x 15.2 x 8.3 cm (9 1/2 x 6 x 3 1/4") Inside: 23.0 x 14.1 x 7.8 cm(9 1/16 x 5 9/16 x 3 1/16")

#### **Cataloging Features:**

Inside: Lid Chart inside alpha-numerically

indexed to cells with I.D. space.

Outside: Card holder with replaceable card


for contents LD.

#### Approximate Shipping Weight:

0.45 Kg (1lb.) per unit.

### CARGILLE TISSUE FILES - for Histopathology

### **Embedment Blocks Cataloging and Storage System**

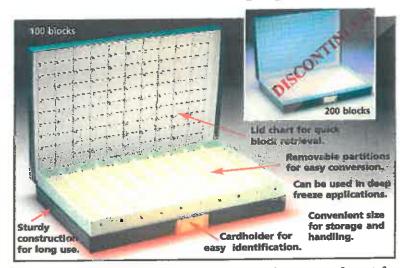

The Cargille Tissue File System incorporates the necessary features for embedment block protection, simplified cataloging, reduction of filing errors and facilitation of retrieval – all in minimal space and at an attractive cost. Each compartment is numerically indexed to a chart on the lid. A heavy duty card and holder on the front provides instant identification of the contents.

Order Cargille Tissue Files: Catalog No. 72010-100 or 72010-200

#### **SPECIFICATIONS**

#### **Embedment Block capacity:**

100 or 200 per Tissue File.

#### Compartments:

 $100 - 3.8 \times 2.5 \times 5.7$  cm (1 1/2 x 1 x 2 1/4) in. 10 across x 10 deep

200 – 2.3 x 1.8 x 4.1 cm (15/16 x 3/4 x 1 11/16) in.

Partitions are removable to enlarge cells.

#### Dimensions:

Outside: 38.7 x 26.7 x 6.0 cm (15 1/4 x 10 1/2 x 2 3/8) in. Inside: 37.8 x 25.1 x 5.7 cm (14 7/8 x 9 7/8 x 2 1/4) in.

#### **Cataloging Features:**

Inside: Lid Chart inside alpha-numerically indexed to cells with I.D. space.

Outside: Card holder with replaceable card

for contents I.D.

#### **Approximate Shipping Weight:**


0.9 Kg (2lbs.) per unit.



Tel: 973-239-6633 • Fax: 973-239-6096 • Cedar Grove NJ 07009-1289 USA

www.cargille.com PAGE 1 OF 5

# CARGILLE SAMPLE STORAGE OPEN STOCK

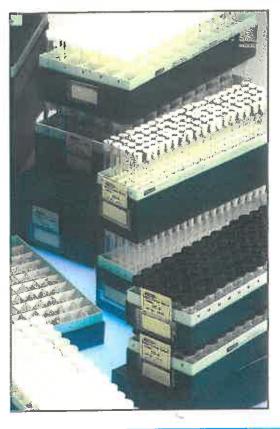


# STANDARD SETS: VOLUMES and CLOSURES CHART

Drams	Ounces	mL		SAMPLE	STORAGE	SERIES	
USFId.	US Fld.		Cork	Poly- Plug	Screw Cap	Poly- Seal	Oz. Sq.
1	0.13	3.7			1		
2	0.25	7.4		1	1		1
3	0.38	11.1	1	1		_	
4	0.50	14.8		<b>/</b>	1	1	
7	0.88	25.9		1			
8	1.0	29.6			1	1	1
10	1.25	37.0		1			
12	1.5	44.4		1_			
16	2.0	59.1					1
32	4.0	118.3					1

# CARGILLE HI-DENSITY STORAGE for Vacutainer brand tubes



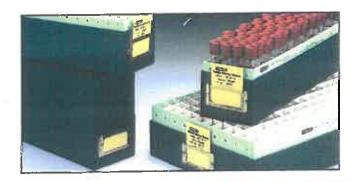

Boxes only - Cargille does not supply Vacutainer®\* collection vials.

Compact, moisture/condensation - resistant fibreboard boxes for 100 or 200 tubes are available configured especially for accommodating the unique sizes of the Vacutainer®\* brand collection tubes. An open inventory item, these boxes are always available to expand your storage capacity.

## CARGILLE SPECIAL MODELS STORAGE BOXES for existing Vial Systems

Model Number - Use this number to determine the following information:

100 - 15 - 78

100 - 13 **-** 92

50 - 27 - 60

Maximum height (millimeters) of vial and closure

Maximum diameter (millimeters) of vial and closure

Number of compartments per box

SPECIAL MODELS
Boxes only
(No caps or vials): Ideally
suited to organize and store
vials currently in use.



Tel: 973-239-6633 • Fax: 973-239-6096 • Cedar Grove NJ 07009-1289 USA

www.cargille.com PAGE 2 OF 5

# CARGILLE SAMPLE STORAGE OPEN STORE

## **Standard Sets: Specifications**

,	Model Cat No. Vial Compartments Box								
		Model	Cat No.				Arrangement	LxWxH	Wt. per set
	CORK	CK-3	36130	Vol. 3 dr	Size, mm 12 x 114	100	5 x 20	11 1/2" x 3" x 5" (292.1mm x 76.2mm x 127mm)	2.2 lbs. 1.04 kg.
		PP-2	36 <b>200</b> (	CAMITI	NUD \$ 51	75	5 x 15	12 1/4" x 4 1/4" x 2 1/2" (311.15mm x 107.95mm x 63.5mm)	1.9 lbs. .86 kg.
		PP-3	36220	3 dr	12 x 114	100	5 x 20	11 1/2" x 3" x 5" (292.11mm x 76.2mm x 127mm)	2.5 lbs. 1.12 kg.
	POLY-PLUG	PP-4	36230	4 dr	23.85 x 62	50	5 x 10	10 1/4" x 5 1/2" x 3" (260.35mm x 139.7mm x 76.2mm)	2.3 lbs. 1.02 kg.
	9LY-1	PP-7	36260	7 dr	29.35 x 65	50	5 x 10	12 1/2" x 6 1/2" x 31/4" (317.5mm x 165.1mm x 82.55mm)	3.2 lbs. 1.48 kg.
	-	PP-10	36280	CONTI	69. <b>83</b> 0× 80	50	5 x 10	12 1/2" x 6 1/2" x 3 1/2" (317.5mm x 165.1mm x 88.9mm)	3.8 lbs. 1.68 kg.
	۱	PP-12	36290	12 dr	29 x 94	50	5 x 10	12 1/2" x 6 1/2" x 4" (317.5mm x 165.1mm x 101.6mm)	4.1 lbs. 1.89 kg.
	1	SC-1	36310	1 dr	15 x 45	100	5 x 20	13 1/2" x 3 1/2" x 2" (342.9mm x 88.9mm x 50.8mm)	1.8 lbs. .71 kg.
	AP	SC-1-200	36320	1 dr	15 x 45	200	10 x 20	13 1/4" x 6 3/4" x 2" (336.55mm x 171.45mm x 50.8mm)	3.5 lbs. 1.53 kg.
	SCREW CAP	SC-2	36330	2 dr	17 x 60	75	5 x 15	11 1/2" x 4" x 2 1/2" (292.1mm x 101.6mm x 63.5mm)	2.0 lbs. .94 kg.
	SCRE	SC-4	36360	4 dr	21 x 70	50	5 x 10	9" x 4 1/2" x 3 1/2" (228.6mm x 114.3mm x 88.9mm)	2.1 lbs .93 kg.
		SC-8	36380	8 dr	25 x 95	50	5 x 10	10 3/4" x 5 1/2" x 4" (273.05mm x 139.7mm x 101.6mm)	3.4 lbs 1.49 kg.
	LY-SEAL	PS-4	36460	4 dr	21 x 70 °	50	5 x 10	9" x 4 1/2" x 3 1/2" (228.6mm x 114.3mm x 88.9mm)	2.2 lbs. 1.00 kg.
	POLY-5	PS-8	36480	8 dr	25 x 95	50	5 x 10	10 3/4" x 5 1/2" x 4" (273.05mm x 139.7mm x 101.6mm)	3.5 lbs. 1.59 kg.
ı		OZ-0.25*	36810	1/4 oz	23 x 23 x 55	50	5 x 10	9 1/2" x 5" x 2 1/2" (241.3mm x 127mm x 63.5mm)	3.8 lbs. 1.73 kg.
	QUA	OZ-1	36830	1 oz	30 x 30 x 72	50	5 x 10	12 3/4" x 6 1/2" x 3 1/2" (323.85mm x 165.1mm x 88.9mm)	5.7 lbs. 2.64 kg.
	OUNCE SQUARE	OZ-2	36840	2 oz	38 x 38 x 87	32	4 x 8	12 1/2" x 6 1/2" x 4" (317.5mm x 165.1mm x 101.6mm)	6.8 lbs. 3.04 kg.
	NNO	OZ-4	36860	4 oz	45 x 45 x 115	21	3 x 7	13" x 5 1/2" x 4 3/4" (330.2mm x 139.7mm x 120.65mm)	7.0 lbs. 3.09 kg.
			1	1			<u> </u>		

<sup>\*</sup>Available only with 1/4 oz amber bottles.



Tel: 973-239-6633 • Fax: 973-239-6096 • Cedar Grove NJ 07009-1289 USA

# CARGILLE SAMPLE STORAGE OPEN STOCK SERIES

# Collect, Catalog, Store, Retrieve

Cargille Sample Storage Sets are available in a variety of box sizes, containers and closures to serve many high-density storage applications requiring cataloged storage in minimum space.

- Complete Sets: Each set includes a partitioned box, vials, closures, dry gummed labels, reference chart and an exterior card holder and card.
- Boxes Only: Empty Standard Set boxes, and additional Special Models boxes (not components of any set), are available to suit your present storage system. These partitioned boxes also include the exterior identification card holder and card.
- Alpha-numerical indexing for rapid identification.
- Open stock inventory assures expansion at any time Prompt Delivery.

#### **Benefits**

- Variety 18 different sets! All boxes, vials and closures are available separately, providing maximum efficiency.
- Versatility Store liquids, powders, small specimens and parts in labeled vials or bottles.
- Accuracy Alpha-numerically indexed compartments for accurate and rapid retrieval and filing of samples.
- Compact Requires little space for storing hundreds of thousands of items.
- Durable Boxes are constructed with a moisture and abrasive-resistant exterior covering.

Suitable for incubator, refrigerator, deepfreeze and controlled atmosphere applications.


#### The Precise Set to Meet Your Needs

Select the proper Sample Storage Set for your needs by using the *Volumes & Closures Chart* on page 3.

First, establish the required volume of the vial, in drams, ounces or mL.

**Then,** read across the chart for available Standard Sets and closure types.









## CK

#### Cork Closure

Most economical, straight-sided, flat-bottom, glass shell vials with high quality cork closures. Ideally suited for storing small parts, geological specimens, soil and many other types of samples. For calibrated tubes, ask for Cargille Eight-Ten Tubes or Viscosity Tubes.

## PP

Poly-Plug Closures
Knurled closures are friction fitting,
washable, and reusable.
Seamless, one-piece polyethylene
construction resists chemical
attack, moisture and material
entrapment.

## SC

#### Screw Caps

Threaded glass vials supplied with black polypropylene screw-caps.
Caps lined with slick-faced polyethylene reduce sample adhesion and create effective seals.

## PS

#### Poly-Seal Closures

Screw-cap design with polyethylene cone lining resists chemical attack. Ideal for volatile and corrosive liquids, and chemical or biological specimens.

## OZ

Ounce/Square Bottles
Largest volume containers of all the sets, the OZ Series contains clear square glass bottles of ounce capacity ratings. Black polypropylene screw-caps have slick-faced polyethylene lining. Caps with glass applicator rods available for 1/4 oz. bottles.



Tel: 973-239-6633 · Fax: 973-239-6096 · Cedar Grove NJ 07009-1289 USA

www.cargille.com PAGE 4 OF 5

Effective: January 15, 2022

# HIGH-DENSITY STORAGE SYSTEMS PRICE LIST



#### SAMPLE STORAGE COMPLETE SETS

#### **INCLUDING VIALS AND CAPS**

			PRICE PER S		***
CATALOG NO.	MODEL NO.	EACH SET	6 SETS	12 SETS	36 SETS
36130	CK - 3	\$ 89.25	\$ 81.50	\$ 78.00	\$ 74.50
36220	PP - 3	\$ 85.25	\$ 78.00	\$ 74.50	\$ 71.50
36230	PP - 4	\$ 87.25	\$ 77.25	\$ 73.50	\$ 71.50
36260	PP - 7	\$ 101.50	\$ 91.25	\$ 86.50	\$ 83.50
36290	PP - 12	\$ 139.75	\$ 128 25	\$ 120.50	\$ 117.00
36310	SC - 1	\$ 99.25	\$ 89.25	\$ 85.00	\$ 82.25
36320	SC - 1 - 200	\$ 150.75	\$ 136.75	\$ 131.75	\$ 127.00
36330	SC - 2	\$ 94.00	\$ 85.50	\$ 82.00	\$ 78.50
36360	SC - 4	\$ 95.00	\$ 87.00	\$ 82.00	\$ 79.50
36380	SC - 8	\$ 115.25	\$ 106.25	\$101.25	\$ 97.25
36460	PS - 4	\$ 101.50	\$ 91.75	\$ 88.50	\$ 84.00
36480	P\$ - 8	\$ 120.00	\$ 109.25	\$ 104.25	\$ 101.25
36810*	OZ - 0.25	\$ 100.50	\$ 89.75	\$ 85 00	\$ 81.50
36830	OZ - 1	\$ 111.75	\$ 103.25	\$ 97.75	\$ 94.00
36840	OZ - 2	\$ 92.75	\$ 85.00	\$ 83.50	\$ 78.00
36860	OZ - 4	\$ 90.00	\$ 81.50	\$ 76.50	\$ 73.50

<sup>\*</sup>Available only with 1/4 oz. amber bottles.

#### SAMPLE STORAGE BOX ONLY

		<u></u>	P	RICE PER DOZE		
CATALOG NO.	MODEL NO.	EACH	1 DOZ	3 DOZ	6 DOZ	12 DOZ
36132	CK - 3	\$ 45.50	\$ 434.25	\$ 408.00	\$ 383.25	\$ 372.50
36222	PP - 3	\$ 46.00	\$ 435.75	\$ 391.50	\$ 383.25	\$ 372.50
36232	PP - 4	\$ 51.50	\$ 490.25	\$ 452.75	\$ 427.75	\$ 417.25
36262	PP - 7	\$ 51.50	\$ 490.25	\$ 452.75	\$ 427.75	\$ 417.25
36292	PP - 12	\$ 52.50	\$ 482.75	\$ 444.75	\$ 420.75	\$ 408.00
36312	SC - 1	\$ 46.75	\$ 449.00	\$ 418.75	\$ 396.00	\$ 384.75
36322	SC - 1 - 200	\$ 52.50	\$ 495.75	\$ 465.25	\$ 438.00	\$ 424.50
36332	SC - 2	\$ 48.00	\$ 456.50	\$ 426.50	\$ 402.75	\$ 391.25
36362	SC - 4	\$ 55.25	\$ 527.25	\$ 490 25	\$ 461.75	\$ 448.25
36382	SC - 8	\$ 48.00	\$ 445.00	\$ 416.00	\$ 394.25	\$ 383.25
36462	PS - 4	\$ 55.25	\$ 527.25	\$ 490.25	\$ 461.75	\$ 448.75
36482	PS - 8	\$ 48.25	\$ 445.50	\$ 415.75	\$ 401.75	\$ 381.75
36812	OZ - 0 25	\$ 55 25	\$ 527.25	\$ 490.25	\$ 461.75	\$ 448.25
36832	OZ - 1	\$ 55.75	\$ 537.75	\$ 500.75	\$ 474.00	\$ 456.25
36842	OZ - 2	\$ 55.75	\$ 517.00	\$ 500.75	\$ 474.00	\$ 456 25
36862	OZ - 4	\$ 53.00	\$ 529.00	\$ 490.25	\$ 461.75	\$ 448.25

FOB & SHIPPING POINT: CEDAR GROVE, NEW JERSEY
MINIMUM ORDER – USA, CANADA, MEXICO: \$ 50.00 • INTERNATIONAL: \$ 70.00
SEE SALES POLICY FOR FULL TERMS / PRICES SUBJECT TO CHANGE WITHOUT NOTICE.
TELEPHONE: 973-239-6633 / FAX: 973-239-6096

#### CARGILLE LABORATORIES

55 Commerce Road • Cedar Grove, NJ 07009-1289 • USA Tel: 973-239-6633 • Fax: 973-239-6096 • www.CARGILLE.COM

Replaces: SS-PL-197A

Effective: January 15, 2022

# HIGH-DENSITY STORAGE SYSTEMS PRICE LIST



#### SAMPLE STORAGE BOX FOR VACUTAINERS®

ITEM	CATALOG NO.	MODEL	EACH	1 DOZ	3 DOZ	6 DOZ	12 DOZ
VACUTAINER®	36562 holds 68 tubes	68-16-112	\$ 44.75	\$ 428.25	\$ 404.00	\$ 377.75	\$ 367.00
STORAGE BOXES	36572 holds 200 tubes	200-19-117	\$105.75	\$1,011.00	\$ 946.25	\$ 889.25	\$ 861.50

Boxes only. Caps and vials not included. Other special storage boxes available upon request. VACUTAINER® is a registered trademark of Becton Dickinson & Co.

#### SPECIAL STORAGE BOXES

SPECIAL MODELS / Boxes Only (No caps or vials): Ideally suited to organize and store vials currently in use.

Model number - use this number to determine the following information:

	SPECIFICATIONS					PRICE PE	R DOZEN		
Catalog Number	Model	Weight Per Box	L x W x H (inches)		EACH	1 DOZ	3 DOZ	6 DOZ	12 DOZ
36532	100 - 13 - 92	9 oz	11-1/4 x 2-13/16 x 3-5/8	5 x 20	\$ 44.50	\$ 428.25	\$ 399.00	\$ 377.25	\$ 366.25
36542	100 - 15 - 78	10 oz	12-1/2 x 3 1/8 x 3-1/8	5 x 20	\$ 56.75	\$ 547.75	\$ 511.00	\$ 482 25	\$ 465.25
36552	50 - 27 - 60	10 oz	11-1/4 x 5-5/8 x 2-3/8	5 x 10	\$ 51.50	\$ 482.25	\$ 444.75	\$ 420.75	\$ 408.00
36562	68 - 16 - 112	11.5 oz	11-1/2 x 3 x 5-1/8	4 x 17	\$ 44.75	\$ 428.25	\$ 404.00	\$ 377-75	\$ 367-00
36572	200 - 19 - 117	24 oz	15-3/4 x 8 x 4-1/2	10 x 20	\$ 105.75	\$1,011.00	\$ 946.25	\$ 889.25	\$ 861.50

### MICROSLIDE FILES For Microscope Slide or Parts Storage

Cat. # 73010: PRICE EACH IN QUANTITIES OF:

Quantity	1	6	12	72	144
Price Each	\$48.50	\$39.00	\$ 37.75	\$ 37.00	\$ 35.25
Ship Wt. (lbs)	1	6	13	60	120

#### **TISSUE FILES**

### For Embedment Block or Parts Storage

Cat. # 72010: 100 Compartments PRICE EACH IN QUANTITIES OF:

Quantity	1	6	12	72	144	Ì
Price Each	\$55.25	\$44.50	\$ 43.00	\$ 42.75	\$ 42.25	
Ship Wt. (lbs)	2	10	18	104	216	1

FOB & SHIPPING POINT: CEDAR GROVE, NEW JERSEY
MINIMUM ORDER – USA, CANADA, MEXICO: \$ 50.00 • INTERNATIONAL: \$ 70.00
SEE SALES POLICY FOR FULL TERMS / PRICES SUBJECT TO CHANGE WITHOUT NOTICE.
TELEPHONE: 973-239-6633 / FAX: 973-239-6096

#### CARGILLE LABORATORIES

55 Commerce Road • Cedar Grove, NJ 07009-1289 • USA Tel: 973-239-6633 • Fax: 973-239-6096 • www.CARGILLE.COM



# CULT-UR™ TABLETS

# STABILIZE URINE SPECIMENS FOR DELAYED LABORATORY CULTURE AND IDENTIFICATION OF URINARY TRACT BACTERIA

#### Maintains Bacterial Viability at room Temperature Up to 72 Hrs.

- Eliminates refrigeration of urine culture specimens during storage or transit.\*
- Prevents over-growth of U.T.I. Bacteria in specimen.

# Maintains Normal Growth and Chemical I.D. Characters of U.T.I. Bacteria

 Culture and subculture growth characteristics are not altered.\*

# Minimizes Growth of Patient Introduced Contaminants

- Accident introduced contaminants won't confuse results because levels are maintained for at least 24 hrs.
- False positives are virtually eliminated-reducing the need for a second sample, and preventing needless patient anxiety.

#### **Convenient To Use**

 No messy or strong smelling liquids to dispense into tubes.

Effective: 1-15-2022

Economica	l Cult-Ur <sup>TM</sup>	<b>Tablets</b>
-----------	-------------------------	----------------

Tablet Size	Cat. No.	Urine Qty.	Tablets per	Price per bottle in Quanti				ities of	f:	
Tablet Size	Çat. No.	Offine Qty.	bti.	·	1		6			12
75 mg	39075	5cc	1,000	\$	113.00		\$ 9	0.75	\$	85.00
			10,000	\$	743.75		\$ 69	4.00	\$	676.50
150 mg	39150	10cc	1,000	\$	121.50		\$ 9	6.75	\$	92.25
			10,000	\$	786.25		<b>\$</b> 73	4.75	\$	710.00
420 mg	39420	29cc	1,000	\$	145.00		\$ 11	7.50	\$	109.75
			10,000	\$	1,011.75		\$ 94	4.50	\$	919.75
			1,000	\$	227.25		\$ 18	1.75	\$	171.25
					1	L	3	15	$\perp$	30
840 mg	39840	56cc	4,000	\$	637.25	\$	593.00	\$ 559.5	0 \$	545.00

(M)SDS AVAILABLE

The Cult-Ur™ Tablets are formulated for effective bacteriostatic action without altering the viability of typical urinary tract bacteria for culture and identification (no fluorides).

## See STABILUR® TABLETS for microscopic sediment analysis

FOB & SHIPPING POINT: CEDAR GROVE, NJ 07009 USA
MINIMUM ORDER - USA, CANADA, MEXICO: \$ 50.00 INTERNATIONAL: \$ 70.00
SEE SALES POLICY FOR FULL TERMS / PRICES SUBJECT TO CHANGE WITHOUT NOTICE.
TELEPHONE: 973-239-6633 / FAX: 973-239-6096

<sup>\*</sup> Microbiological analyses performed by Analytab Products Inc. (API), under the supervision of Dr. Geophery McKinley, 1986



### **CARGILLE LABORATORIES**

55 Commerce Road • Cedar Grove, New Jersey • 07009-1289 USA Phone: 973-239-6633 Fax: 973-239-6096 www.cargille.com

## CULT-URIM TABLETS FOR GENERAL STABILIZING OF URINE

Cargille Labs has two products for stabilizing urine for delayed testing:

Stabilur® and Cult-Ur<sup>TM</sup>

Stabilur® has been used for 70 years to stabilize urine for up to 3 days at room temperature (un-refrigerated) for urine chemistries and morphological study.

Stabilur® increases specific gravity of 0.002 and lowers pH by 0 to 1 pH units; other wise it has little interference with urine chemistries.

Stabilur® kills micro-organisms, but maintains their microscopic appearance and Chemistries.

Cult- $Ur^{TM}$  was developed 45 years later to stabilize urine for up to three days at room temperature (un-refrigerated), to prevent micro-organism overgrowth, without killing the micro-organisms, so that cultures can be grown.

Cult- $Ur^{TM}$  also has little effect on chemistries and will stabilize urine for chemical analysis for 2-4 days.

Cult-Ur<sup>TM</sup> has not been widely used for chemistries and morphological study, as long as there is Stabilur® and its 70 years of proven minimal non-interference for these uses.

Now that there is increasing concern about smaller and smaller quantities of residual chemicals, Stabilur®'s 0.36% Mercuric Oxide is a concern at some centers conducting urinalysis.

Cargille has made Stabilur® without mercuric oxide and has been found it to be much less effective.

 $\underline{\text{Cult-Ur}^{\text{TM}}}$  does not contain mercuric compounds. For those who want to avoid mercury, it is suggested that you consider:

Cult- $Ur^{TM}$  for both purposes: stabilizing viable micro-organism and also stabilizing that urine for chemical and microscopic evaluations.

It is recommended if you are considering using Cult-Ur^TM instead of Stabilur®, that you qualify Cult-Ur^TM with the tests you are running.



# STABILUR® TABLETS

# STABILIZE URINE SPECIMENS FOR DELAYED LABORATORY MICROSCOPIC EXAMINATION OF URINE SEDIMENT

#### Maintains\* Red and White Blood Cells in Original Conditions

- Prevents the usual rapid lysis of leukocytes to assure accurate confirmation of this key indicator of urinary tract infection¹
- Permits accurate counting and estimation of erythrocytes.

#### Maintains\* the Morphology of Typical Formed Elements in Urine Sediments Such as Casts, Crystals and Mucous Threads

- Morphology and staining characteristics of casts and cells are retained in original condition.
- Tablet dissolves completely, and does not contribute any crystals to the sediments <sup>2</sup>

#### Maintains\* Most Urine Dipstick Chemistries

- Maintains most chemical constituents in urine for retesting by dipstick chemistry by preventing bacterial decomposition.
- Does not interfere with enzyme based dipstick chemistry tests, i.e. leukocyte esterase.\*

At recommended levels urine pH is buffered to just under neutral, and specific gravity is raised 0.002.

#### Maintains\* Other Chemistry Assay Components

Effective: 1-15-2022

 Does not Interfere with certain TLC and RIA methods for assay of physiological marker compounds and drugs and their metabolytes.

#### Economical Stabilur® Tablets

	-								
Tablet Size	Cat. No.	Urine Qty.	Tablets per	Pric					
i apier Size	Cat. No.	Offine Qty.	btl.		1	П	6	$\Gamma$	12
25 mg	40025	3 - 5cc	1,000	\$	142.00	\$	115.25	\$	106.00
			10,000	\$	938.00	\$	887.25	\$	862.00
50 mg	40050	5-10cc	1,000	\$	146.50	\$	118.00	\$	112.00
		1	10,000	\$	954.50	\$	903.50	\$	880.00
95 mg	40095	10-20cc	1,000	\$	154.00	\$	125,25	\$	120.25
			10,000	\$	997.50	\$	902.00	\$	868.75
276 mg	40276	30-60сс	1,000	\$	184.00	\$	148.00	\$	140.50
			10,000	\$	1,287.50	\$	1,211.25	\$	1,169.50

(M)SDS AVAILABLE

The Stabilur® tablets contain a proprietary mixture of buffering and osmolality adjustment Ingredients, plus agents which produce a minute quantity of several bacteriostatic chemicals sufficient to prevent bacterial degradation of urine constituents, without interfering with most analyses. Shelf life is 5 years from date of purchase.

- 1. Depending on osmolality and ph of the urine, up to 90% of unsatabilized leudocytes are lysed in as little as 2.5 hours at elevated room temperature. Even at 4 degrees C, 50% may be lost in that time.
- 2. Wait until the tablet has completely dissolved before centrifuging the sample (approx. 30 min. + ).
- 3. Validated on Ames (Division of Miles Laboratories) and Boehringer Manhelm chemistry dipsticks: November, 1986.

#### See CULT-UR™ TABLETS for microbiological culture and identification



#### CARGILLE LABORATORIES

55 Commerce Road • Cedar Grove, New Jersey • 07009-1289 USA Phone: 973-239-6633 Fax: 973-239-6096 www.cargille.com

# SUBSTITUTION OF CULT-UR TABLETS FOR STABILUR TABLETS FOR GENERAL STABILIZING OF URINE

Cargille Labs has for a long time sold two products for stabilizing urine for delayed testing: Stabilur for 70 years and Cult-Ur for 20 years.

Stabilur has been used for 70 years to stabilize urine for up to 3 days at room temperature (un-refrigerated) with little interference with urine chemistries. Stabilur increases specific gravity of 0.002 and lowers pH by 0 to 1 pH units. Stabilur kills micro-organisms, but maintains their microscopic appearance.

Cult-Ur was developed to stabilize urine, and prevent micro-organism overgrowth without killing the micro-organisms, so that cultures can be grown for up to 3 days without refrigeration. Cult-Ur also has little effect on chemistries and will stabilize urine for chemical analysis for 2-4 days. It has not been used that way, as long as there is Stabilur and its 70 years of proven non-interference to use for this purpose.

0.36% Mercuric Oxide is an important component in Stabilur. Cargille has made Stabilur without mercuric oxide and have found it to be much less effective. Cult-Ur does not contain mercuric compounds. For those who want to avoid mercury, it is suggested that you consider Cult-Ur for both purposes: stabilizing viable micro-organisms and also stabilizing the urine for chemical and microscopic evaluations. It is recommended if you are considering substituting Cult-Ur for Stabilur, you qualify Cult-Ur with the tests you are running.

Replaces: BAT-DS-197A Effective: January 15, 2022



#### **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

### **BORIC ACID NF TABLETS**

Tablets of Boric Acid are available from stock in convenient sizes and weights. Used in the biology field as a <u>preservative and bactericide</u>. Boric Acid Tablets also serve as a <u>grinding</u> aid in Spectroscopy.

The many applications of Boric Acid open up the possibilities for cost reduction in numerous other fields where the advantages of tablets have not been explored.

The costs of tableting have been saved many times over by eliminating weighing and dispensing cost, eliminating dust, simplifying solution preparation and permitting automatic feeding and metering.

#### Potential applications include:

•	Weather-proofing wood	•	Nickel baths	•	Carpets
•	Wick impregnating	•	Glass	•	Printing
•	Preservation	•	Dyeing	•	Leather
•	Electrical condensers	•	Porcelain	•	Photography
•	Fire-proofing fabrics		Painting	•	Hardening steel
•	Manufacture of cement crockery	•	Borates	•	Enamels

#### Boric Acid NF - Quantity: Bottles of 1000

#### Current in-stock tablet sizes are listed below

Catalog #	<u>Weight</u>	<u>1M</u>	<u>5M</u>	<u>10M</u>	25M
41120	0.4 gm	\$ 91.25	\$ 81.00	\$ 71.00	\$ 60.75
41121	0.5 gm	\$ 99.50	\$ 87.00	\$ 76.00	\$ 65.00
41123	1.0 gm	\$ 108.75	\$ 97.00	\$ 84.00	\$ 71.00
41125	2.0 gm	\$ 140.25	\$ 125.75	\$ 108.75	\$ 92.75
41127	2.5 gm	\$ 156.50	\$ 138.75	\$ 119.75	\$ 103.75



# VISCOSITY TUBES

for Measuring Viscosity by the Air Bubble Rise Method

#### INTRODUCTION


Rheology is a branch of science dealing with the deformation and flow of materials which includes the subject of viscosity. Viscosity is a measurement of internal friction, or resistance, to flow by external forces. Viscosity is the ratio of shear force to shear rate (the slope of the curves in Figure 1a) expressed by:

$$\eta = \frac{f/A}{dv/dx} = \frac{\text{shear force}}{\text{shear rate}} v_{v=Veloc}^{\text{A-Area}} v_{v=Veloc}^{\text{Political rate}}$$

The viscosity of many materials depends on shear rate and is classified accordingly, Figure 1b. Viscosity is expressed as Absolute  $\eta$ , and Kinematic, v. Absolute viscosity is determined by measuring the shear force required to produce a given shear rate and is independent of the density of the liquid. Kinematic viscosity is measured by the time required for a given volume of liquid to flow through a capillary or restriction. It is related to flow caused by the hydrostatic head of the liquid and therefore strongly dependent on density.

The relationship between Absolute and Kinematic viscosity is given by the following, where  $\rho$  is density:  $\gamma = n/\rho$ 

One of the simplest methods for determining Kinematic viscosity is by the rising bubble technique employing matched viscosity tubes. The method is visual, convenient, rapid and easily learned by technical and non-technical personnel.

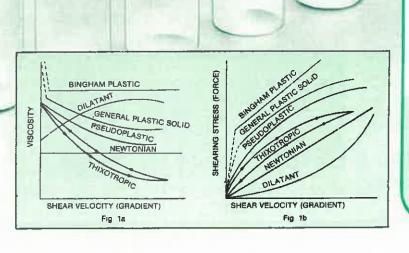

Cargille Time Test Viscosity Tubes Meet ASTM D1545



# Rising Bubble Technique, Principle

The time required for an air bubble in a liquid to rise is directly proportional to its viscosity. Bubble rise rates vary with the inside diameters of viscosity tubes; therefore, the tubes must be precision matched to a tolerance that will keep bubble rise rate variations below the level of visual detection. Variations in viscosity readings or comparisons are visually imperceptible from viscosity tubes with inside diameter tolerances closer than  $\pm 0.025$ mm. Any variations in readings are attributed to differences in viscosities.

Viscosity is determined by either measuring the time an air bubble takes to pass between two specifically spaced marks on viscosity tubes, or by comparison to the bubble rate rise of calibrated viscosity standards. The accuracy of the method is therefore a function of precision matching of tube bores and identical score heights, which are measured from the center outside bottom.

Other factors, such as uniformity of temperature and verticality of tubes, influence timed bubble travel and controlled laboratory techniques are essential for precise results. For example, a variation in temperature of 0.1°C will cause a 1% variation in the timed bubble travel, and a one radius departure from tube verticality may introduce a 10% error in timed bubble travel.

# Procedure for Using Cargille Viscosity Tubes

A viscosity tube is filled to the 100mm level score with the material to be tested. A cork is inserted to the 108mm score which provides and fixes a uniform air bubble. The sample, and standard if used, is placed in a suitable rack and immersed in a water bath until a uniform temperature of 25°C (77°F) is attained. If viscosity determinations are performed by referral to comparison samples of known viscosities or precisely calibrated standards, then they too should be at the same temperature as the samples. Viscosity is determined by one of two methods:

#### **COMPARISON METHODS**

The bubble rate rise of the samples is compared to samples of known viscosities or calibrated standards contained in tubes of the same dimensions. The rack containing the samples and standards is removed from the water bath, held vertically to stabilize the air bubbles and quickly inverted maintaining verticality. A comparison of air bubble speed of the samples to the standards permits estimation of viscosity; the faster the rate of bubble rise, the lower the viscosity. The user may prepare viscosity standards or employ Gardner Viscosity Standards.

TIME-METHOD (ASTM D-1545) Time-Test Tubes are required to determine viscosity by the Timed-Method. The length of time, in seconds, required for an air bubble to pass from the 27mm to 100mm score mark, a distance of 73mm, is approximately equal to the viscosity of the liquid in "Stoke" units; alternatively, viscosity may be expressed in "Bubble Seconds." It is important to note that the position of the air bubble in relation to the 27mm score should be similar at the end of the test on the 100mm score.

#### VISCOSITY TUBE SELECTION GUIDE

Cargille Viscosity Tubes are divided into four Classes as determined by precision sorting in accordance with bore size, number of score marks and contemplated method of use for bubble rise testing, Figure 2. The numbers assigned refer to bore size, which is expressed in mm. TIME-TEST VISCOSITY TUBES, 10.65mm Time-Test Viscosity Tubes are frequently referred to as ASTM D-1545 Tubes, which originated from the adopted standard method of test for viscosity as described in ASTM D-1545\* issued by the American Society for Testing and Materials. Time-Test Tubes are scored in three places, Figure 3b: 27mm, 100mm and 108mm. The score mark at 27mm is used for a 73mm timed bubble travel. Time-Test Viscosity Tubes are also subjected to additional testing procedures to ascertain the 10.65mm bore which is very critical for

precision measuring.
CLASS "G-10.65" AND CLASS "V-10.75" TUBES
Class "G-10.65" and "V-10.75" Viscosity
Tubes are used principally for direct comparisons to Gardner Viscosity Standards. Both Classes of tubes are inscribed at the 100mm and 108mm lengths, Figure 3a.

For bubble rate rise comparisons to Gardner Viscosity Standards, the following equivalency chart is provided: Cargille Class "G-10.65" = Gardner Grade A Tubes Cargille Class "V-10.75"=Gardner

Grade B Tubes
CLASS "V" VISCOSITY TUBES

Class "V" Tubes are the least expensive of the viscosity tubes. Their principal utility is for comparison to other samples or standards of known viscosities as prepared by the user. Class "V" Tubes are the Cargille specific assigned sizes between 10.50 and 11.00mm, with the exception of the 10.65mm and Class "V-10.75"mm sizes. Within this range, a specific tube size will be assigned, recorded in the Cargille

Master File for future reference on reorders to insure furnishing the identical tube size. The Class "V" Tubes are also inscribed at the 100mm and 108mm lengths, Figure 3a.

\*Copies of ASTM-D-1545 are available free of charge upon request.

Fig 2

#### CLASSIFICATION OF CARGILLE VISCOSITY TUBES

CLASS	SCORE MARKS	10 ±0 025mm	METHOD OF TESTING
Time-Test, 10 65mm (ASTM D-1545)	108mm 100mm 27mm	10 65	Bubble time rise or bubble comparisons
Class 'G-10 65"	108mm 100mm	10 65 (equivalent to Gardner A tubes)	Bubble comparisons to Gardner Standards, or to calibrated
Class "V-10 75"	108mm 100mm	10 75 (equivalent to Gardner B tubes)	standards with identical tube dimensions
Class 'V'	108mm, 100mm	10 50 to 11 00**	Bubble comparisons to standards prepared by the user

NOTE: All score marks are measured from the center of the outside bottom. \*\*Excluding 10.65 and 10.75mm sizes.



**ACTUAL SIZE** 

# Viscosity Tube Specifications

#### DIMENSIONS

Cargille Viscosity Tubes are manufactured to the closest possible tolerances and then precisely measured for final selection.

Length	114mm ±2mm
Wall Thickness	0.65mm
Tolerance, I.D	±0.025mm
Composition	. Soda-lime glass, flat-bottom
Score Height Tolerance	±0.5mm
MOTE: Inside diameter tolerance	

NOTE: Inside diameter tolerance closer than  $\pm 0.025$ mm is unnecessary since variations in viscosity readings or comparisons would be imperceptible.

#### **SCORE MARKS**

All Cargille Viscosity Tubes are permanently marked with two score marks, at 100mm and 108mm heights (Figure 3a) with the exception of Time-Test Viscosity Tubes, which have an additional score at 27mm (Figure 3b). In compliance with ASTM D-1545, all score marks are measured from the center outside bottom of the tubes.

The score mark at 100mm represents the filling level and the 108mm score is used to fix the size of the air bubble in the tube by inserting a cork to this mark. The 27mm and 100mm scores on Time-Test Viscosity Tubes are used to time bubble rise. In instances where more than one viscosity tube size is used, in the same laboratory, an additional score is inscribed, on request, to differentiate between sizes, Figure 3c.







ADDITIONAL SCORE MARK FOR DIFFERENTIATING BETWEEN VISCOSITY TUBES WHERE MORE THAN ONE SIZE IS USED IN THE SAME LABORATORY

# Cargille Quality Assurance Service

Cargille Laboratories, Inc. maintains a master record for every Viscosity Tube customer. All production specifications related to the specific viscosity tubes supplied are maintained indefinitely. Each subsequent request for similar viscosity tubes is individually processed by referral to the firm's specifications record. This record keeping avoids any possibility of potential typographic error in requisitioning viscosity tubes. Cargille's unique Quality Assurance Service is automatically effected and is applicable to singular or multiple viscosity tube purchases.

#### CARGILLE VISCOSITY TUBES & ACCESSORIES

CAT. NO.	NO. BESCRIPTION		DESCRIPTION				
44154	154 TIME-TEST		ROUGH SORT TUBES: HIGH				
44106	CLASS G:10.65	44280	SHELL VIALS				
44107	CLASS V:10.75	44004	CORKS/BAG OF 150				
44100	CLASS V:	44004	CORKS/BULK				
44350	O COLOR TUBES 44010 RA		RACK, 10 TUBE				
44200	4200 ROUGH SORT TUBES: LOW		THERMOMETER				

# Viscosity Tube Accessories



#### CARGILLE "10" VISCOSITY TUBE HOLDER

All stainless steel construction; holds up to 10 viscosity tubes by convenient spring-loading design. Samples and standards may be concurrently immersed in water bath, removed and held vertically for bubble rate rise comparisons.

#### VISCOSITY TUBE SAMPLE STORAGE BOX



A durable, compact, solid, fibreboard Sample Storage Box with attractive dark green, moisture and abrasive resistant exterior covering holds up to 100 viscosity tubes in partitioned compartments. The compartments are arranged

5 x 20 and are alpha-numerically indexed for rapidly locating stored viscosity samples. Boxes are supplied with separate, correspondingly-numbered index chart for recording pertinent sample information, and an exterior card in a polished brass card holder for easily identifying the general contents of the Sample Storage Box Model CK-3.

#### **ROUGH SORT TUBES**

Tubes unsuitable for viscosity applications are separated, sorted, matched and grouped in two ranges according to tube bore size. Although these tubes are not precision matched or scored, they are adequately matched in bore size for diversified use in general industrial and laboratory procedures.

industrial and laboratory procedures.

Rough Sort Tubes, Low ...Range: 10.50 - 10.75mm;

Rough Sort Tubes, High ... Range: 10.75 -11.00mm

COLOR TUBES Critical color or turbidity comparisons are frequently affected by variations in the light path of the liquid sample. To minimize this "visual diluting" effect, tubes are available with matched bore sizes to ±0.05mm to insure replicate volume comparisons under similar light path conditions.

Dimensions: 114mm long, 10.80mm I.D., 0.65mm wall thickness.

SHELL VIALS Tubes exhibiting bore sizes exceeding Viscosity, Color and Rough Sort Tube specifications are available for innumerable laboratory applications where inside dimensional tolerance is not critical. Dimensions: 114mm long, approximate 12mm 0.D., 0.65mm wall thickness.



#### CORKS

High quality, short length corks properly fit viscosity tubes so that the small end is in firm contact with inside of tubes to prevent small extraneous bubbles from interfering with timed bubble movement.

#### THERMOMETER



20° to 30°C; graduated in 0.1°C increments; immersible type; 4½" long for conveniently inserting in viscosity tubes.

Replaces: VT-PL-197A Effective: January 15, 2022



### **Cargille Laboratories**

55 Commerce Road • Cedar Grove • New Jersey • 07009-1289 USA Phone: 973-239-6633 • Fax: 973-239-6096 • WWW.CARGILLE.COM

### VISCOSITY TUBES PRICE LIST

		PRICE				
CATALOG NO.	<u>DESCRIPTION</u>	1 DOZEN *	1/2 GROSS *	1 GROSS		
44154	Time - Test ( ASTM-D-1545 )	\$ 72.50	\$ 168.00	\$ 286.25		
44106	Class " G-10.65 "	\$ 65.75	\$ 145.75	\$ 248.25		
44107	Class " V-10.75 "	\$ 59.25	\$ 126.75	\$ 217.50		
44100	Class "V"	\$ 52.75	\$ 107.25	\$ 184.50		
			* Corks Included			
44350	Color Tubes, 10.80 - 10.85 MM I.D	\$ 42.75	\$ 66.50	\$ 101.00		

44350	Color Tubes, 10.80 - 10.85 MM I.D	\$ 42.75	\$ 66.50	\$ 101.00
44370	Colormetric Tubes, 10.85 MM I.D.	\$ 27.25	NA	\$ 127:00
44200	Rough Sort Tubes, Low	\$ 38.75	\$ 59.25	\$ 89.00
44250	Rough Sort Tubes, High	\$ 38.75	\$ 60.00	\$ 89.50

36134	PRICE PER GROSS								
CK-3 (SHELL	1 GROSS	3 GROSS	6 GROSS	12 GROSS	24 GROSS				
VIALS )	\$ 73.50	\$ 70.75	\$ 64.25	\$ 54.00	\$ 49.50				

### **ACCESSORIES**

44004	Corks ( for Viscosity Tubes ) 150 corks per pkg	\$ 18.75	/ per pkg.
36132	Sample Storage Box CK-3, holds 100 tubes	\$ 45.50	/ each

FOB & SHIPPING POINT: CEDAR GROVE, NJ 07009 USA
MINIMUM ORDER – USA, CANADA, MEXICO: \$ 50.00 INTERNATIONAL: \$ 70.00
SEE SALES POLICY FOR FULL TERMS / PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

TELEPHONE: 973-239-6633 / FAX: 973-239-6096